

Attachment O1



GARNET ENERGY CENTER

Case No. 20-F-0043

1001.24 Exhibit 24

Visual Impacts

UPDATED: January 7, 2022

Contents

Exhibit 24: Visual Impacts	1
24(a) Visual Impact Assessment.....	1
(1) Character and Visual Quality of the Existing Landscape.....	43
(2) Visibility of the Project	1140
(3) Visibility of Above-Ground Interconnections and Roadways	1615
(4) Appearance of the Facility Upon Completion	1948
(5) Lighting.....	2019
(6) Photographic Overlays	2019
(7) Nature and Degree of Visual Change from Construction	3130
(8) Nature and Degree of Visual Change from Operation.....	3231
(9) Analysis of Operational Effect	3736
(10) Measures to Mitigate for Visual Impacts.....	4038
(11) Description of Visual Resources to be Affected	4342
24(b) Viewshed Analysis.....	4342
(1) Viewshed Maps	4342
(2) Methodology	4442
(3) Viewer Groups Overview.....	4645
(4) Scenic Resources Inventory.....	4846
(5) Viewpoint Selection	5553
(6) Photographic Simulations and LOS.....	5756
(7) Visual Impact Rating of Project Photosimulations	5857
(8) Visible Effects Created by the Project	6462
(9) Documentation of Stakeholder Outreach	6563
(10) Short-Term Visual Effects Created by the Project.....	6563
Exhibit 24: Visual Impacts	1
24(a) Visual Impact Assessment.....	1

(1) Character and Visual Quality of the Existing Landscape.....3

(2) Visibility of the Project10

(3) Visibility of Above-Ground Interconnections and Roadways14

(4) Appearance of the Facility Upon Completion17

(5) Lighting.....18

(6) Photographic Overlays18

(7) Nature and Degree of Visual Change from Construction27

(8) Nature and Degree of Visual Change from Operation.....28

(9) Analysis of Operational Effect33

(10) Measures to Mitigate for Visual Impacts.....35

(11) Description of Visual Resources to be Affected39

24(b) Viewshed Analysis.....39

(1) Viewshed Maps39

(2) Methodology.....39

(3) Viewer Groups Overview.....42

(4) Scenic Resources Inventory.....43

(5) Viewpoint Selection50

(6) Photographic Simulations and LOS.....53

(7) Visual Impact Rating of Project Photosimulations.....54

(8) Visible Effects Created by the Project59

(9) Documentation of Stakeholder Outreach60

(10) Short-Term Visual Effects Created by the Project.....60

Tables

Table 24-1. Population of VSA Communities.....4

Table 24-2. Percentage of Landscape Similarity Zones within 5-Mile VSA9

Table 24-3. Percent Visibility of the 5-Mile VSA¹14

~~Table 24-4. Inventory of Visual Resources within the Five Mile VSA49~~
~~Table 24-5. Summary Table Simulation and LOS Viewpoints57~~~~56~~
~~Table 24-6. Visual Impacts Rating Results61~~~~60~~
~~Table 24-1. Population of VSA Communities.....4~~
~~Table 24-2. Percentage of Landscape Similarity Zones within 5-Mile VSA8~~
~~Table 24-3. Percent Visibility of the 5-Mile VSA112~~
~~Table 24-4. Inventory of Visual Resources within the Five Mile VSA45~~
~~Table 24-5. Summary Table Simulation and LOS Viewpoints52~~
~~Table 24-6. Visual Impacts Rating Results56~~

Appendices

- Appendix 24-1. Visual Impact Assessment
- Appendix 24-2. Glint and Glare Study
- Appendix 24-3. Glare Mitigation Package

Exhibit 24: Visual Impacts

24(a) Visual Impact Assessment

This Exhibit will track the requirements of Stipulation 24, dated March 5, 2021, and therefore, the requirements of 16 New York Codes, Rules and Regulations (NYCRR) §1001.24.

In order to determine the extent and assess the significance of the visibility of the Project, a Visual Impact Assessment (VIA) has been conducted (see Appendix 24-1). The VIA includes both quantitative and qualitative identification of visually sensitive resources, viewshed mapping, confirmatory visual assessment fieldwork, visual simulations (photographic overlays), and proposed visual impact mitigation. This Updated Exhibit 24 provides an abbreviated version of the VIA and addresses the issues presented herein. Please also refer to the full VIA in Appendix 24-1 of the Article 10 Application for greater detail.

The Garnet Energy Center (the Project) will have a generating capacity of 200 megawatts (MW), as well as a 20 MW/four-hour duration energy storage system. The Project will be located on land leased and/or purchased from owners of private property in the Town of Conquest, Cayuga County, New York. Proposed Project Components include commercial-scale solar arrays, access roads, buried (and possibly overhead) electric collection lines, an energy storage system, a Project collection substation, and electrical interconnection facilities. Refer ~~to to Figure C.200 in Attachment 1 for the site plan, as well as Figure 1 in Attachment 2, both found in Appendix 24- the engineering drawings in Updated Appendix 11-1 and 4Figure 24-1 in Updated Exhibit 24 .~~

Solar Arrays: The Applicant intends to utilize a solar module similar to the Jinko Solar Eagle 72HM G2 380-400 Watt Mono Perc Diamond Cell. The Project will utilize a fixed array racking system such as the Gamechange Solar Genius Tracker™ System. Technical data sheets for this module and racking system have been included in the Exhibit 2 Appendices. The Applicant is also considering the use of bifacial modules.

The base case design for the Project currently proposes a fixed racking system with a bifacial panel height that will be up to 11 feet above ground.

Due to unknown market conditions regarding the availability of solar modules in the near future and with a commercial operation date of 2023, the Applicant is also considering alternative tracker

racking systems. Though currently not anticipated, in the event tracker technology is ultimately utilized for the Project, future design trends are indicating that the panels may reach a maximum height of up to 18 feet when at full-tilt with a dual-portrait solar panel orientation. The maximum height of a tracker system is only sustained for a short period during daylight hours as the racking makes continuous angle adjustments to follow the sun. For example, tracker systems lay flat near midday when the sun is directly overhead resulting in a panel height considerably lower than the maximum height of 18 feet during midday. As a result, for the majority of the time when the panels will be visible, the tracker system will be less than 18 feet in height. While the arrays may be taller, the final buildable area needed to meet the Project generating capacity is not anticipated to increase.

For the purposes of this report, the base case for this Project consists of fixed arrays with a maximum height of 11 feet. Additionally:

- This VIA has produced Project simulations representing 11-foot-tall bifacial fixed panels.
- To account for future modules that may become available, the visibility viewshed analyses have conservatively used 18-foot-tall panels to predict potential visibility of the Project.

Inverters: Inverters will be located throughout the solar arrays to convert the direct current (DC) electricity generated by the solar modules into alternating current (AC) electricity. Cables from the solar modules are routed to the inverters using a CAB® cabling system or underground lines. The collection lines then convey electricity from the inverters underground to the Project collection substation and ultimately to the existing electric transmission system. The Applicant intends to use Power Electronics HEM inverters or a similar make/model. Refer to Appendix 2-3 for the technical data sheet.

Access Roads: Roads within the Project Area used to access solar arrays will follow existing farm roads and trails, where practicable, to minimize the need for new roads. The same access roads used during construction will be used during operation of the Project and will be gravel surfaced.

Collection Lines: The 34.5 kilovolt (kV) collection lines will connect the inverters with the Project collection substation. Collection lines will be installed underground via direct burial and horizontal directional drilling (HDD).

Fencing: Fencing will be placed around the perimeter of the arrays and associated structures. Fencing will be chain link, seven to eight feet in height and will only be topped with barbed wire around the perimeter of the collection substation and switchyard.

Project Collection Substation: The 34.5 kV collection lines within the Project Area will collect electricity from the inverters and transport it to a new collection substation. The collection substation, located on the central portion of the Project Area off of Cooper Street, will step up the voltage to 345 kV. Please see Appendix 11-1 of the Application for plan and profile drawings associated with the collection substation.

Point of Interconnection (POI) Facilities: Power from the collection substation will be transferred to the switchyard and then interconnected to the existing New York Power Authority (NYPA) Clay to Pannell 345-kV transmission line by two new 345-kV interconnection lines of approximately 207 and 563 feet, respectively. The collection substation and POI switchyard will be transferred to NYPA to own, maintain, and operate.

Energy Storage Systems: The Project also includes an energy storage system with a capacity of 20 MW for a four-hour duration. There are 11 energy storage systems located throughout the Project Area adjacent to Project inverters and will be contained within cabinets that are anticipated to be approximately 10 feet in height.

The following definitions will be used to describe various areas or boundaries of the Project:

Project: the proposed Garnet Energy Center solar facility.

Project Area: the acreage area encompassing all Project parcels located within the Town of Conquest. The Project Area consists of land that is currently either leased or owned by the Applicant and can therefore be defined as properties belonging to participating landowners.

Component or Facility: an individual piece, or collection of equipment or improvement of the Project, including a solar array, access road, fencing, inverters, energy storage systems, buried electric collection lines, electrical interconnection facilities, and laydown areas.

VSA: Visual Study Area. A 5-mile radius around the fence line of the Facility specifically designated for the study of visual impacts.

(1) Character and Visual Quality of the Existing Landscape

Solar panels are proposed in the Town of Conquest, New York. The VSA is a 5-mile radius and primarily includes Cayuga County and a small eastern portion of Wayne County. The definition of the VSA is 5 miles around the fence line of the proposed solar arrays. As a result of the larger Study Area under consideration, a number of additional towns are included beyond that of the Project location.

Distance Zones are assigned within the VSA as required by Stipulation 24(b)(1). Currently, Distance Zones of 0.5 miles, 2 miles, and 5 miles are proposed. The towns within the VSA along with population estimates sourced from the U.S. Census Bureau, 2015-2019 American Community Survey 5-Year Estimates are provided below in Table 24-1:

- Towns that fall within 0.5 miles: Cato and Conquest.
- Towns and Villages that fall between 0.5 and 2.0 miles: Brutus, Cato, Conquest, Ira, Mentz, Victory, and Village of Cato.
- Towns and Villages that fall between 2 and 5 miles: Brutus, Butler, Cato, Conquest, Ira, Mentz, Montezuma, Savannah, Victory, Village of Cato, Village of Meridian, Village of Port Byron, and Village of Weedsport.

Table 24-1. Population of VSA Communities

Town/Village	Population (2019 Estimates)
Brutus, Wayne County	4,294
Butler, Cayuga County	1,864
Cato, Cayuga County	2,478
Conquest, Cayuga County	1,899
Ira, Cayuga County	2,402
Mentz, Cayuga County	2,217
Montezuma, Cayuga County	1,560
Savannah, Wayne County	1,888
Victory, Cayuga County	1,843

Table 24-1. Population of VSA Communities

Town/Village	Population (2019 Estimates)
Village of Cato, Cayuga County	521
Village of Meridian, Cayuga County	312
Village of Port Byron, Cayuga County	1,035
Village of Weedsport, Cayuga County	1,768

The Project is in the town of Conquest, New York, approximately 10 miles north of the Cayuga county seat of Auburn and 20 miles east of Syracuse. The VSA is rural and primarily consists of mixed forest groups, wooded wetlands and open land that also includes hay/pasture and cultivated crops as well as rural residential land. The majority of the Project within the Cayuga County portion lies in Agricultural District #5. For the Wayne County portion of the VSA, Agricultural District #1 is predominant.

Various views of the rural character and the nature of roadways within the VSA can be obtained in the Project Photolog in Attachment 3 of Appendix 24-1. Most of the residential development in the VSA consists of rural residential houses along roadways. Several small, low population villages are also recognized. The Villages of Cato and Meridian lie 0.9 and 2.6 miles to the northeast of the Project Area, respectively. The Villages of Port Byron and Weedsport are 3.6 miles to the south. Each of these villages are also represented in the Project Photolog.

Physiographically, the site is approximately 14 miles south of Lake Ontario in the Erie-Ontario Lowlands physiographic province, and approximately 1.6 miles north of the Seneca River. The Erie-Ontario Lowlands in the vicinity of the Project is characterized by wet and dry flats mixed in with a series of post-glacial drumlin fields, which are elongated rounded and gently rolling hills that are oriented in a north to south fashion. The elevation range in the VSA is 370 feet to 627 feet above mean sea level (AMSL), not varying much more than 257 feet AMSL within a 5-mile radius. In the general vicinity of the Project within 0.5 miles, the elevation ranges between 385 and 593 feet AMSL with terrain fluctuating within 208 feet. The higher elevations nearing 500 plus feet reflect the top of geologic drumlin hill features which in general, have geometries approximately 800 feet wide east to west and 0.3 miles long north to south. The lower elevations at the base of these hills drop to around 400 to 460 feet AMSL.

In addition to the Seneca River, there are other small waterbodies used recreationally. They are Otter Lake in Cato, 3.2 miles west of the Project, Parker Pond in Cato, 2.4 miles to the northeast, and Duck Lake in Conquest, 1.7 miles west of the Project.

Roadways in a Project vicinity ultimately are important to understand since they are one of several viewer groups that may receive Project visibility. This viewer group could consist of local community, commuter, or tourist constituency on a daily or infrequent basis. To help describe the rural nature of the area and thus provide an understanding of the quantity of viewers by road travel, annual average daily traffic (AADT) counts are provided in the listing of roadways in the area in Table 2 of Appendix 24-1 VIA. AADT is a measure used primarily in transportation planning and transportation engineering. Traditionally, it is the total volume of vehicle traffic of a highway or road for a year divided by 365 days. For perspective, Interstate 90 (I-90) located 3 miles south of the site has an AADT of 18,230, while Project roadways such as NY Route 34 and NY Route 38, have AADTs of 1,433 and 453, respectively. Other Project local roads such as Lake Road and Fuller Road, have AADTs of 201 and 280, respectively.

Landscape Similarity Zones

Landscape Similarity Zones (LSZs) are areas of similar landscape and aesthetic character based on patterns of landform, vegetation, water resources, land use, and user activity. These zones provide additional context for evaluating viewer circumstances where relationships between viewer groups and visual experience can be made, as well as understanding the influence that the LSZ has on visibility. For example, a viewer's experience will be different in a forested area vs. open water vs. open land vs. urban areas. Viewer groups, as well as potential viewer frequency and duration of view, can also be estimated as they relate to LSZ.

Land cover classification datasets from the 2016 United States Geological Survey (USGS) National Land Cover Dataset (NLCD) are available for Geographic Information System (GIS) analysis and were used for an initial establishment of LSZs because they provide distinct and usable landscape categories. These NLCD land cover groupings were then refined based on aerial photo interpretation and general field review into land category characteristics that have the ability to influence or be influenced by visibility of the Project. This effort resulted in the definition of five final LSZs within the VSA as depicted in Table 24-2 and on Figure 2 in Attachment 2 of Appendix 24-1, and include the following:

Zone 1: Agricultural – This zone is characteristic of open land and includes cultivated land and that which is used for row crops, hay or pasture, and can sometimes be left fallow. Agricultural lands are most often privately owned and while they may be abundant in a particular area, the numbers of the viewing public, as well as the frequency and duration of viewers, is likely low.

Zone 2: Forested – This zone includes mature deciduous and coniferous tree groups either in uplands or wetlands. Forested areas may be abundant, and the general public may have greater access to forested areas on public lands as many recreational activities are available within them. However, views may be very limited as outward views beyond the tree canopy or large tree groupings are typically not prevalent.

Zone 3: Developed – This zone includes villages, towns, cities, rural residential abutting roadways, and transportation corridors. Thus, this zone included those areas that are expected to have the highest number of observers whether rural, urban, static, or transient. Typically, villages and towns may not have prevalent views of other development at distance since more densely spaced building structures or existing street side trees can preclude many views. Privately owned rural residential dwellings, if in close proximity to the Project, have a higher likelihood of receiving views of a nearby project. Roadways absent of roadside vegetation can also potentially afford many transient and intermittent views of short duration by the viewing public.

Zone 4: Open – This zone includes miscellaneous other open land that may have minor development with less visually obstructive features such as minor expanses of barren land, land with short scrub shrub vegetation, cemeteries, golf courses, paved lots, or playgrounds. This zone, often in public or semi-public locations, has a higher potential of experiencing views of a nearby project because of limited low-profile features.

Zone 5: Open Water – There are a few water bodies with associated recreational activities to warrant an open water category. Larger lakes, ponds, and rivers recognized in this zone are: Otter, Duck, and Cross Lakes, Parker Pond, and the Seneca River. Other smaller unnamed water bodies, as well as open water of emergent wetlands, may be present. Most water bodies such as lakes and ponds are by nature very open and can potentially afford views to nearby projects. The number of viewers would be higher in publicly accessible locations. Duration of views may not be either long duration or transient but could be experienced over the course of a day. Rivers may not be as susceptible to direct line of sight views to projects if riparian vegetation is abundant.

Rivers are also located at low valley elevations where higher topography on either side could block views to nearby projects.

Table 24-2 summarizes the percentage of LSZs in the VSA.

Table 24-2. Percentage of Landscape Similarity Zones within 5-Mile VSA

LSZ	Distance Zone 1 0.5 Miles		Distance Zone 2 0.5-2.0 Miles		Distance Zone 3 2.0-5.0 Miles		Total Square Miles of LSZ	Total Percent of LSZ in VSA
	Square Miles	% of LSZ w/in VSA	Square Miles	% of LSZ w/in VSA	Square Miles	% of LSZ within VSA		
Zone 1 - Agricultural	5.55	3.93%	14.23	10.05%	44.63	31.54%	64.41	45.52%
Zone 2 - Forested	6.08	4.30%	12.49	8.83%	43.26	30.57%	61.83	43.70%
Zone 3 - Developed	0.55	0.39%	1.65	1.16%	6.84	4.83%	9.04	6.39%
Zone 4 - Open	0.16	0.11%	0.35	0.25%	2.45	1.73%	2.96	2.09%
Zone 5 - Open Water	0.02	0.02%	0.84	0.60%	2.39	1.69%	3.25	2.30%
Totals	12.37	8.74%	29.56	20.89%	99.57	70.37%	141.49	100.00%

LSZ 1 Agricultural and LSZ 2 Forested are co-dominant and occupy 45.5% and 43.7% of the 5-mile VSA, respectively. These two zones also occur in similar percentages to each other throughout each Distance Zone as well. The occurrence of LSZ Developed drops significantly and comprises 6.4% of the land area in the VSA. Zone 4 Open is land with few visual obstructions such as minor expanses of barren land, land with short scrub-shrub vegetation, and emergent wetlands, and occurs in the least amount and comprises 2.1% of the VSA. Zone 5 Water (primarily as Otter, Duck, and Cross Lakes, Parker Pond, and the Seneca River) accounts for 2.3% of the VSA.

Distance Zones

Delineation of Distance Zones are based on Project distances from the fence line to an observer. Three distance zones are applied to the Project: foreground, middle ground, and background. Each of these areas will determine the level of visual detail and acuity of objects. Distance Zones are often identified by the definitions in *The US Forest Service Landscape Aesthetics – A Handbook for Scenery Management* (US Forest Service Handbook) (1995). The effects of distance are highly dependent on the characteristics of the landscape. However, size, level of visibility perceived for this particular type of project (solar panels), and panel position in the landscape should also be considered in determining zones. Distance Zones for this Project have been reasonably modified from the US Forest Service Handbook to accommodate the VSA radius, limitations of human vision and perceptible detail of the low profile of the Project components, and how much of the Project can actually be seen. Solar panels are not wind turbines or tall buildings. They are of a different character with a low vertical height profile (11 feet tall) in comparison to other larger objects found in the landscape such as houses, barns, and trees, in addition to the rolling topography in the area that could easily visually obstruct farther locations. Solar projects typically have lateral breadth but the visibility of solar projects in the northeast, because of frequent and highly vegetated narrow ridges and valleys and dense forest areas surrounding agricultural lands, often do not offer substantial far-reaching vistas of many miles. Distance Zones for this project are as follows:

- Distance Zone 1: Foreground (up to 0.5 miles from the viewer). This is the closest distance at which details of the landscape and the solar panels can be seen. Individual landscape forms are typically dominant and individual panel strings and racking system details may

be seen. The concentration of predicted visible areas lie within this zone typically due to proximity to the Project.

- Distance Zone 2: Middle ground (0.5 to 2 miles from the viewer). At this distance, individual tree forms and building detail can still be distinguished at, for example, 1 mile. The outer boundary of this distance zone, however, is defined as the point where the texture and form of individual plants are no longer visibly acute in the landscape. In some areas, atmospheric conditions can reduce visibility and shorten the distance normally covered by each zone. Solar panels lose their level of detail and are seen as a contiguous mass of form and/or color.
- Distance Zone 3: Background (2 to 5 miles from the viewer to the horizon). At the extent of background distances, texture disappears, and color flattens but large light and dark patterns of vegetation or open land due to shape or color are distinguishable and ridgelines and horizon lines are the dominant visual characteristics. Landscapes are simplified and are viewed in groups or patterns. Solar panels can be detected as a distant form and color change but are not as discernible.

Further discussion on the percentages of visibility for each Distance Zone can be found in Appendix 24-1 and in Exhibit 24(a)(2) below.

(2) Visibility of the Project

To understand the locations from which the Project may be visible, viewshed maps were developed. Two viewshed analyses were performed, one with bare earth topography-only and one with vegetation. Results from a topography-only viewshed analysis are not considered representative of the surrounding landscape as trees and buildings are not included. However, the analysis illustrates the effects of the surrounding terrain and determines if landform is responsible for obscuring some of the views. Visibility maps can be found in Attachment 2 of Appendix

24-1. Figure 24-1 shows updates to the Project layout.

The proposed panels for this Project will have a fixed racking system with array heights up to 11 feet. However, as noted in Exhibit 24(a) for the viewshed analysis, the top of the panels with the viewshed model was conservatively set at a maximum of 18 feet in height above ground surface

(e.g. full tilt tracking system) to include assessment for photovoltaic models that may become available in the future.

Viewshed Results for Arrays – Topography Only

As noted above, viewshed analysis with bare earth topography without trees is not recognized as being a realistic representation of potential visibility because it is not truly reflective of the environment due to the absence of all trees. Another caveat is that the topography-only results must not be interpreted as representing visibility during leaf-off conditions, since even leaf-off bare branched tree groups act as a solid mass where lines of sight to objects can be screened. Despite the limitations of a topography-only analysis, it is a useful tool in understanding the influence that terrain has on blocking views to the Project.

The bare earth topography-only viewshed analysis results show that without the presence of existing vegetation, the Project is visible in much of the VSA and is predominant within 2 miles. However unrealistic this result may be, it indicates that topography is fairly level within the majority of land within 2 miles where the terrain is not high enough to block views. However, there does exist a series of geologic glacial drumlins (elongated hills oriented north-south) that occur to the northeast, east, and southeast. These drumlin fields serve to block many easterly views between 0.5 and 2 miles and block most east and west views between 2 and 5 miles.

Some topographic-only screening does occur beyond 2 miles. The visibility that is present between 2 and 5 miles tends to occur at the crests of higher terrain to the north, west, and south. Refer to the Attachment 2 mapping in Appendix 24-1. Views from the east and west are obstructed by topography, as well as isolated areas to the north in Ira and Victory and to the south in Mentz and Brutus.

Viewshed Results for Arrays – Trees and Buildings Included

The viewshed analysis results (Attachment 2 of Appendix 24-1 [and Figure 24-1](#)) show areas of expected visibility.

This analysis, per Stipulation 24(b)(1), incorporates trees and buildings in the study area in addition to topography and gives the most reasonable and realistic depiction of the surrounding Project landscape. The results of this analysis provide the focus of visibility discussion in the VIA because of the inherent aspects of reproducing realistic conditions when LiDAR datasets are used. When vegetation is included to present a more realistic depiction of the landscape, potential visibility decreases substantially. The viewshed analysis results in the Appendix 24-1 Attachment

2 maps show limited visibility is expected. The general vicinity surrounding the Project is a mosaic of well-forested and open land, as illustrated in Figure 1 Site Location and Figure 2 Landscape Similarity Zone maps in Attachment 2 of Appendix 24-1. These forested areas, along with the topography of the rolling hills and fields of geologic hill features (drumlins) in the area, provide much screening and preclude many views. The majority of visibility that is expected occurs mostly in a focused location inside of the 0.5-mile Distance Zone 1, within the Project parcels themselves, and in a few roadways, open fields, and nearby properties within and outside of the Project area. As seen in Figure 4 of Attachment 2, Appendix 24-1, the majority of visibility occurs on properties belonging to participating landowners. Although the panels are sited in open land within forested areas, the low-profile panels set against existing tree buffers, hedgerows, and tree groups that frame the panel locations, are enough to obscure many outward views. Because of the maximum panel height in relation to the mature vegetation, there are minimal far-reaching views outside of the general array locations. Outside of Distance Zone 1, visibility is expected to be minimal to non-existent.

The Project has been strategically sited away from population centers and other sensitive visual receptors. The effect that this siting strategy has on potential visibility for visual resources is apparent in Table 24-4. Few visual changes are expected to occur to the visual resources listed in Table 24-4. In fact, all but 5 sensitive receptors are over 1 mile away (snowmobile trails, 2 cemeteries, 1 town recreation field, and a small parcel of the Northern Montezuma Wetlands State Wildlife Management Area are within a mile). Only the snowmobile trails are expected to have visibility of the arrays since they cross through some of the Project Area, and these views will be limited due to the transient use of these trails.

Figure 24-1 shows proposed layout updates. Overall, the total area of panels and racking systems that will cover the Project Area was reduced from approximately 512 acres to 326.76 acres and the fenced-in area that will consist of Project Components was reduced from approximately 1,054 acres to 901 acres as a result of the update. In order to still achieve this significant reduction in proposed solar arrays and still achieve the Project's required generating capacity of 200 MW, a minor addition of arrays is proposed in an area not visible to adjacent landowners. This area is located in the northeastern portion of the Project west of Schooley Road, where approximately 13.8 acres of panels have been added to the layout. An updated viewshed analysis was performed with the inclusion of the added panels (and proposed removal of others) but with a focus of understanding potential new visibility to residences along Schooley Road. Based on the updated viewshed analysis, a new additional visible area extends into the open field on

private land to the north where no members of the public are expected to be and no residences exist and would likely only be visited infrequently by the landowner. As seen in Inset 1 of Figure 24-1, this new area of visibility totaling 5.3 new acres (0.008 square miles) of visibility does not impact residences on Schooley Road nor any aesthetic resources. Project-wide, with both the additional and removed solar arrays, visibility is now reduced from 3.23% to 2.28% of the land area within the VSA.

From the results of the viewshed analysis with vegetation, the percent visibility of the land area located in the 5-mile VSA is shown in Table 24-3 and discussed below.

Table 24-3. Percent Visibility of the 5-Mile VSA¹

Distance Zone	Total Area Comprising Distance Zone (Square Miles)	Visibility Within Distance Zone (Square Miles)	% Visibility Within Distance Zone	% Visibility Within Full VSA
Zone 1 0-0.5 Miles	12.37	3.29 <u>3.09</u>	26.60 <u>24.99</u> %	2.32 <u>2.18</u> %
Zone 2 0.5-2.0 Miles	29.56	0.11 <u>0.08</u>	0.36 <u>0.27</u> %	0.07 <u>0.06</u> %
Zone 3 2.0-5.0 Miles	99.57	0.09 <u>0.06</u>	0.09 <u>0.06</u> %	0.07 <u>0.04</u> %
Total	141.49	3.49 <u>3.23</u>	2.47 <u>2.28</u> %	2.47 <u>2.28</u> % ¹
¹ 1.75 <u>1.63</u> % of the 2.47 <u>2.28</u> % total visibility in the VSA occurs on lands belonging to participating landowners.				

Table 24-3 shows that when considering visibility between Distance Zones, the highest amount of visibility occurs within the 0.5-mile radius of Zone 1, comprising ~~26.6~~24.99% of just the Zone 1 land area. This is because there is a concentrated amount of visibility in proximity to the Project within the 0.5-mile radius, much of it within the solar array parcels themselves in open land as well as open adjacent parcels to the Project and several roadways. In addition, some of that acreage consists of visible areas within the adjacent NYPA 345 kV Pannell to Clay transmission line right-of-way (ROW). There is an abrupt difference once outside of the 0.5-mile radius. Visibility within Distance Zones 2 and 3 drops to a negligible <1% each. There is approximately ~~3.5~~3.23 square miles of total visibility within the entire 141.5 square miles that comprises the VSA. Therefore, only ~~2.47~~2.28% of the VSA is predicted to experience partial, close, intermittent, or distant views of the Project.

Furthermore, the Project Area itself consists of 2,288.7 acres or 3.6 square miles and falls entirely within the 0.5-mile radius of Zone 1. The Project Area is described as acreage area encompassing all Project parcels located within the Town of Conquest and is comprised of land that currently is either leased or owned by the Applicant and can therefore be defined as properties belonging to participating landowners. Visibility results also indicate that 1.751.63% of the total 2.472.28% visibility within the VSA occurs on land within the Project Area, and thus, on participating landowner properties. The remaining 0.720.65% of Project visibility will occur on non-participating landowner parcels.

Visibility of Solar Arrays at Article 10 Resources

Visibility results from the viewshed analysis are explained above. The viewshed visibility results, and as summarized in Table 24-4, indicate that the only federal, state, or county Article 10 sensitive visual receptors that will have a view of the Project are trails for two private snowmobile clubs that are a part of the New York State Snowmobile Association. The Cato Trailblazers and Port Byron Snow Panthers each have trails running through the Project area. A segment of Trail S55D is already routed within the existing NYPA 345 kV Pannell to Clay transmission line ROW and associated lattice towers. Specifically, however, the small trail segments designated as S55B and S55D located in Conquest near NY State Route 38, Cooper Street, and Drake Road as they approach the vicinity of the existing powerline, will likely receive partial, intermittent, and transient views of solar arrays as seen in the Appendix 24-1 VIA mapping. As a result of Project updates, solar panels have been removed as well as some reduced tree clearing in the vicinity of the snowmobile trails. Short segments of snowmobile trails will experience reduced visibility where panel removal is proposed. In particular, larger removal areas lie just east of the intersection of Lake Road with State Route 38 and also near the junction of snowmobile trail S55B and S55D that is north of the proposed collection station. Panels will still be visible in fields. However, fewer panels will be visible due to those removed. As important, the amount of tree clearing seen along these snowmobile trails will be reduced as well. Trees that were once proposed to be cleared in the panel removal areas near the State Route 38 and north of collection substation locations noted above will now remain.

Historic resources in the VSA are not expected to have views of the Project.

Visibility of Solar Arrays at Local Resources

Local scenic resources are those locations that are officially listed or designated in an adopted comprehensive or master plan. Those local resources that have been recognized by document research and/or were received as a response from the outreach program described in Exhibit 24(b)(5) are listed in Table 24-4. There are no designated local scenic resources listed in Table 24-4 that will have views of the Project. However, not classed specifically as agency listed scenic resources, it is recognized that local town residents and local roadway traffic will experience views of the Project in varying locations.

Included with Attachment 3 Project Photolog in Appendix 24-1 is an aerial photo map series that shows predicted visibility at all photolog viewpoints. Many of the viewpoint locations are along roadways at nearby residences. Several segments of local roadways running through the interior of the Project as well as perimeter roads may experience transient views from vehicular traffic. Much of this visibility along intermittent road segments are within 0.5 miles in Distance Zone 1 and include those such as Cooper Street, Slayton Road, Spook Woods Road, Montana Road, Oneil Road, Drake Road, Field Farm Road, and State Route 38. Views from several nearby residences along these roads are represented in the Project photosimulations such as VP4b, VP7, VP12, VP13, VP15a, VP16a, VP19, and VP61. Each VP simulation and visual change in the view is described further in Exhibit 24(a)(6).

As noted in Exhibit 24(a)(1), discrete areas of low intensity populated areas exist within the VSA and include the Villages of Cato, Meridian, Port Byron, and Weedsport. Several visual resources within each of the Villages exist and are noted in Table 24-4. The Project Photolog in Appendix 24-1 has several photos as well, illustrating the character of these small population centers. Predicted visibility mapping indicates that none of these villages are expected to see any of the Project arrays nor the Table 24-4 listed visual resources within them.

(3) Visibility of Above-Ground Interconnections and Roadways

Viewshed Results for the Collection Substation

The collection substation is located approximately 240 feet west of Cooper Street on land adjacent to the existing NYPA 345 kV Pannell to Clay transmission ROW. The existing lattice towers of the transmission line in the vicinity of Cooper Street are approximately 90 feet tall. Views to these existing lattice towers will continue to be obtained offering similar in-kind electric infrastructure at the site. The tallest components at the collection substation will include three 56-foot lightning

masts, several 101-foot tall dead-end structures at the switchyard, and 76-foot tall dead-end structures at the substation. Other utility components with less vertical height include transformers, bus equipment, and breakers ranging from 23 to 37 feet tall. A control building is proposed that will be 17 feet tall.

Figure 5 in Attachment 2 of Appendix 24-1 shows visibility based on the tallest components of the collection substation which includes 101-foot tall surge arrestors at the switchyard, several 76-foot tall dead end structures at the substation, and three 56-foot tall lightning masts within the fence line. Results show that most visibility occurs within 0.5 miles in locations that are within the existing NYPA 345 kV Pannell to Clay transmission ROW and land within the Project Area that is already occupied by the arrays. There is visibility along approximately 0.6 miles of the linear ROW. There is some visibility just north of the collection substation in open land where arrays are proposed and also areas that extend in a linear fashion to the south. Very short segments of Cooper Street and Slayton Road may experience views of taller components. Moreover, the Project Area is defined as all Project parcels that are either owned or leased by the Applicant. Since the majority of views will occur within the Project Area, the majority of visibility from the tallest substation components are falling on land already belonging to participating landowners. There are, however, a few isolated areas of visibility outside of the Project Area in either adjoining or unconnected land parcels farther away from the Project. Most of these discrete areas occur in privately owned open fields where the general public is not expected to be. Despite the tall structures, far reaching views are not obtained and there are minimal to no distant views outside of 0.5 miles.

Appendix 24-1 mapping also shows visibility based on the lower electrical components of the substation with less vertical height that include transformers, bus equipment, and breakers as well as a control building. These components range from 17 to 37 feet tall. The lower electrical components do not add any additional new visible areas over that of the taller components. The visible areas just occupy a smaller footprint within the visible areas of the tall structures, generally restricted to the existing ROW and within the array footprints themselves as well as short roadway segments along Cooper Street and Slayton Road. There are some extended areas to the south that may see some of the shorter components but nearly all of it occurs within the Project Area. Visibility of lower collection substation components does not exceed 0.5 miles.

Line of Sight Profiles for Collection Substation

Line of Sight (LOS) profiles in Attachment 4 of Appendix 24-1 illustrate the anticipated visibility of the collection substation at locations proximal to the site. L1 LOS is located on Cooper Street at a location that would represent what vehicular travel would observe when passing by the site.

LOS L1 shows the various collection substation components. Although there are forested areas to the north and west, they occur behind the proposed substation at the L1 viewpoint and will serve to block views elsewhere but not at the viewpoint location. As the collection substation is located in an open field, the profile shows an unobstructed view of the substation and switchyard from LOS L1.

L1 LOS is also near a resident who is located approximately 360 feet away to the southeast. To mitigate potential views of these interconnection facilities for this single residence, the Applicant is proposing a special planting template in this area (see Type 3 planting template in Appendix 11-2, landscape plans). This special planting template includes a solid row of evergreen species including eastern red cedar, white spruce, and blue spruce species, along with a mix of deciduous tree species and shrubs in order to provide maximum visual screening.

L2 LOS is approximately 646 feet away from the fence line located on Cooper Street south of the proposed collection substation and near a residence. If unmitigated, views of the existing transmission towers within the ROW will still be maintained at the L2 location and will offer similar in-kind infrastructure within the view. LOS L2 shows the various components in the profile. This area will be mitigated with vegetative plantings. Although the collection substation is proposed in open field, the LOS profile shows views are not expected due to proposed mitigation plantings along the roadside on Cooper Street.

L3 is located on Cooper Street southwest of the proposed collection substation and near a residence, approximately 933 feet from the fence line. As noted in the profile, a small, forested area exists between the viewer and the collection substation essentially creating a 245-foot deep vegetative barrier. There are no expected views due to the screening of the existing trees.

Roads used to access solar arrays will follow existing farm roads and trails where practicable in order to minimize the need for new roads. The same access roads used during construction will be used during operation of the Facility and will be gravel surfaced.

(4) Appearance of the Facility Upon Completion

Site visits were made to obtain photos during leaf-on and leaf-off conditions on September 10, 2020, November 6, 2020, and March 4, 2021. See the Project Photolog in Appendix 24-1. However, leaf-off photos are typically chosen for simulations over leaf-on in order to depict the worst-case scenario. A digital SLR full frame Canon EOS 5D Mark II with a 50 mm fixed lens was used for taking photos. The field photo-effort attempted to provide the most unobstructed views as possible at north, south, east, and west positions and/or in areas where the viewshed maps represent potential visibility. Simulations are presented in Attachment 4 of Appendix 24-1.

To create visual simulations, Autodesk 3DS MAX 2020 visualization software was used to correctly dimension the Project 3D models onto the digital photographic image from each viewpoint location. TRC created the 3D model of the solar layout by using engineering specifications obtained from Westwood, the design engineers for the Project. The terrain elevation data (z value) needed to place the panels correctly on the surface of the earth was derived from the LiDAR sources noted in Exhibit 24(b)(2). Proposed grading elevations were incorporated into the model. Using the engineering site plan and LiDAR terrain surface data in GIS, each x, y, z coordinate location of each proposed solar array was obtained and imported into Autodesk 3DS MAX visualization software including the terrain surface itself. A 3D model of every proposed individual solar array was then physically constructed according to the proposed panel specifications and tilt angle along with the proposed racking system. The proposed arrays were built as bifacial double-portrait fixed panels with a height of 11 feet above ground surface with the array axis oriented east-west. The simulation model was further developed to position the viewer at the selected vantage point. For a given vantage point, the visualization software is capable of providing and adjusting a camera view that matches that of the actual photograph. From the field effort, the documented camera coordinate (x, y, z) positions were entered into the model along with other camera information. The arrays were further refined within the simulation photograph by referencing point cloud LiDAR data against the landscape features seen within the photo. For the landscaping simulations, a CAD version of the proposed landscaping plan obtained directly from the Project Landscape Architect was imported into the MAX modeling environment where, subsequently, each proposed tree and shrub species was then translated and built into 3D, and growth heights set and placed in with the Project along the fence line according to the landscape plan. The day and time of the photographs were also recorded and typically exist as electronic information embedded in the respective digital photograph files. This information was used to

adjust for the sun angle in the simulation software in order to represent lighting conditions for the time of day and year for that which is seen in the photo.

(5) Lighting

Lighting is only proposed at the Project interconnection facilities and is only for security, safety, and maintenance purposes. No lighting is proposed within the solar arrays. Details regarding the Project's Lighting Plan, such as the type, number, location, elevation of exterior fixtures, and representative manufacturers cut sheets for lighting fixtures are included in the Preliminary Design Drawings in Appendix 11-3. Manually operated security lighting is proposed at the collection substation and switchyard. Lighting is not proposed outside the energy storage facility. A lighting plan for the collection substation and switchyard is included with the Exhibit 11 drawings. This plan was developed to minimize fugitive light while meeting lighting standards established by the National Electric Safety Code (NESC). The collection substation and switchyard will primarily remain unoccupied. All lighting will be activated manually and turned on by a switch. Lighting will be installed facing downward to minimize potential impacts to the surrounding public. Lighting has been designed to provide up to a maximum 3.4 foot-candle average, to eliminate unnecessary light trespass beyond the collection substation and switchyard. Lighting will be attached to equipment or pole structure mounted and will not be illuminated during unoccupied periods. The collection substation and switchyard will use full cut-off fixtures and task lighting wherever feasible, as specified in the Lighting Plan. Drop-down optics will not be used for the Project.

(6) Photographic Overlays

In order to simulate the visual changes that are anticipated from introducing the built facilities into the Project Area, high-resolution computer-enhanced image render processing was used to create realistic photographic simulations of the proposed Components from selected viewpoints.

The Project proposes to install fixed racking systems as noted in Exhibit 24(a). The solar arrays for the simulations are set at 11 feet above ground surface (the height at maximum tilt).

The following is a summary of the potential visibility to viewers at simulation locations. The complete visual simulations for the Project are provided in Attachment 4 in Appendix 24-1.

In addition to alignment changes, the Landscaping Plan also has proposed updates which can be seen in Updated Appendix 11-2, primarily consisting of removing landscaping where arrays are no longer proposed.

VP4b Slayton Road, View Southwest – Conquest (LSZ 1.3; Distance 260 feet)

Panels will be removed at this location thus increasing the distance to the Project from 260 feet to 1,049 feet from the viewer. Other changes to this VP include the removal of linear Vegetative Mitigation (VM) segments, VM-37 and VM-38, as they are adjacent to a section of arrays that are also proposed to be removed. VM-34 located north of the access road will be shortened by 25 feet. VM-33 on the south side of the access road at the top of the hill will be shortened by 20 feet and moved closer to the fence line. VM 3-G is newly proposed mitigation 415 feet in length on the east side of the arrays that will remain, in order to screen against predicted glare. Following these updates, the conclusion is that the VP4b simulation of the Project in the June 28, 2021 Application overestimates potential visibility.

This viewpoint represents a view at the eastern side of the Project. The viewer is located on Slayton Road, 430 feet south of the existing NYPA 345 kV Pannell to Clay transmission line corridor and is near a residence with potential views that is located perpendicular to the road (out of view to the left). ~~The Project fence line and arrays have varying distances but are approximately 260 feet away from this viewpoint.~~ This view also represents rural areas of less population, such as isolated residences close to the Project. The camera angle and location have been chosen to show the character of the area in context to the surroundings as well as what motorists would see approaching the Project. The existing conditions contain a small amount of successional growth (camera-right) in the immediate foreground along with young deciduous trees and an overhead distribution line running parallel to the linear road. Aside from the open hay/pastureland, the background comprises divided deciduous and coniferous forest groups and a rural farmstead interrupting a portion of the visible horizon.

Proposed conditions show that the overall form and line of the array field is apparent in the existing landscape due to proximity and presence of discernible detail such as the security fence, solar panels, and racking system. Overall Project Part 1 visual contrast (of the Visual Impact Rating), see Exhibit 24(b)(7), however, is rated as moderate. Arrays massed at this distance display a different kind of texture overall compared to the existing field conditions. The darker panels contrast with the existing earth tone, autumn, and green colors found in the landscape but provide a similar color and value to the asphalt road. The man-made structure of the farm, utility structures, and the road in the image help to tie the solar panels into a context with existing development that appears less incongruous. From this vantage point, the size and scale of arrays appear codominant in the image frame balanced with the grass massing and the road. There is

minimal interruption of the horizon line. New vertical and horizontal line edges are introduced but are compatible with other horizontal and vertical lines in view.

Although existing foreground vegetation offers some screening, it is not being relied upon in the landscape design nor purposely used to screen any future views that may occur into the Project site from this viewpoint. Any screening by existing vegetation is incidental. There is proposed Project mitigation at the fence line facing the road that is intended to provide screening to a non-participating resident that is across the road and perpendicular to the array locations (left of photo) as depicted on the Landscape Plan drawings included in Appendix 11-2. It also serves to block some views along the open roadway. Accordingly, it is expected that there will be partial views as the proposed landscaping grows to maturity as demonstrated in the simulation with mitigation at 5 years. The inclusion of vegetative mitigation softens and moderates the effects of the security fence from the VP4b vantage point. A variety of ornamental, pollinator-friendly, small tree and shrub species are incorporated throughout the planting scheme and provide a naturalized planting look that is aesthetically pleasing. Views of the mitigation for motorists will be intermittent and of short duration while longer duration views will be obtained by residences. The farmstead in the background is a participating landowner.

VP7 Drake Road, View South Southwest – Conquest (LSZ 1,3; Distance 324 feet)

This viewpoint generally represents a view of the eastern side of the Project. This viewpoint was captured on Drake Road within the vicinity of a small residential grouping. The Project fence line and arrays have varying distances. The observer is adjacent to a non-participating residential property (right of photo) on Drake Road facing south-southwest, approximately 324 feet from the Project fence line. The viewpoint location is representative of what a local rural resident may experience, such as close foreground views of the Project with the inclusion of the proposed setbacks that provide an undeveloped land buffer between the Project and landowners. Existing conditions show maintained lawn transitioning to an open, partially harvested field with the prominent overhead NYPA 345 kV Pannell to Clay transmission line that intersects the background sky. Along the forested background lies a farmstead and a single silo structure subsumed by the distant forested hill. The existing photo is comprised of linear open land with soft-sloping topography. The farmhouse, silo, outbuildings, road and electric transmission infrastructure create a small but rural development footprint.

From this viewpoint location, the sight lines in the proposed conditions simulation show clear views of solar panels due to proximity of the Project in the open field. The overall form and line of

the arrays is seen as a horizontal shape sweeping across the view in a similar pattern to the far distant ridge and background trees. The panels are at such an angle to lighten the felt weight of their presence as the panels stretch across the view towards the south and continue out of sight. The panels and fence appear to be a continuation of the dark tree line and tree covered hills in the distance. New form, line, and color contrasts are introduced and have contiguous lateral breadth but minimally interrupt the horizon line. Features such as the fence, panels, and racking system have discernible detail due to proximity, and combined with a repetitive pattern, provide some texture contrast. Arrays are darker than the existing field but are somewhat visually absorbed by the presence of darker background trees. The dark asphalt of the road in the foreground anchors the panels and tree line in the frame. Project Part 1 visual contrasts overall are rated as moderate.

There is no existing vegetation that is purposely being used to screen views. The distant farmstead is a participating landowner. As depicted on the Landscape Plan drawings included in Appendix 11-2, the proposed Project mitigation is intended to provide screening to the non-participating residences that are across the road to the left as well as to the residence that is to the right of the photo out of the view. The mitigation also serves to block views along the open roadway. Accordingly, it is expected that there will be partial views as the proposed landscaping grows to maturity as demonstrated in the simulation with mitigation at 5 years. With the inclusion of vegetative mitigation, views are softened and moderated as the trees and shrubs are more congruous with the existing environment and the Project color and value contrasts are reduced. Views of the mitigation for motorists will be intermittent and of short duration while longer duration views of the vegetative buffer will be obtained by residences.


VP12 Spook Woods Road (132), View Northwest – Conquest (LSZ 1; Distance 60 feet)

As a result of this Update, some array groups have been removed at VP12. Following this Update, the conclusion is that the VP12 simulation of the Project in the June 28, 2021 overestimates potential visibility.

This viewpoint is located on Spook Woods Road near the southern region of the Project Area. The Project fence line is approximately 60 feet away from the viewer where the view overlooks a large agricultural field and is relatively close to a small group of residences. Existing conditions show field and sky as large dominant horizontal shapes in the view. Trees present in the view act as a visual perimeter around the field and present as a small darker horizontal band in the distant background.

Proposed conditions show that the overall form and line of the array field mimics and conforms to the horizontal aspects of the ground contours. However, the Project dominates the view and contrasts against the existing landscape due to proximity and presence of discernible detail such as the fence, solar panels, and racking system. Arrays are darker contrasting against the existing ochre colored field. On the whole, the Project is low profile where panels are lower than the trees. The space of field left undeveloped provides a visual break from the large front grouping of panels. The background arrays on the hill show very low size contrast while the distant panel color is more compatible with background trees. Project visual contrasts are rated on the high end of moderate.

This location was chosen as a representative view of the southern portion of the Project along the roadway and near residences. However, proposed mitigation does not appear within the simulation view. Inset 1 below shows the viewpoint location. Proximal residences just to the north and south will have landscape mitigation (thick green line) but happen to be out of the view of the simulation.

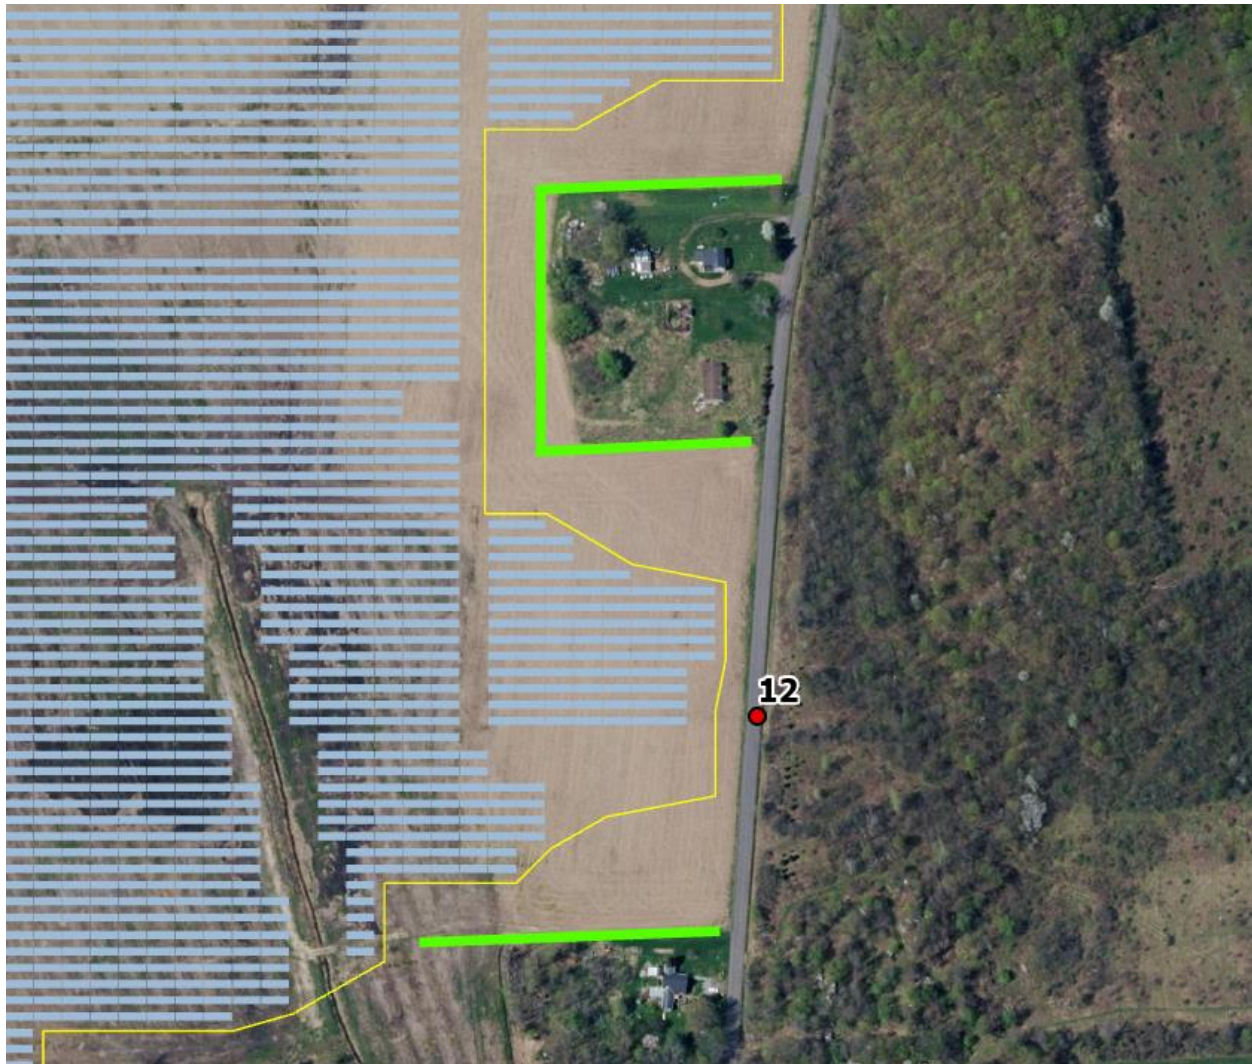

Inset 1. Aerial photo showing visual mitigation of nearby residences to VP12. Green line represents proposed landscape screening location.

VP13 Spook Woods Road (132), View Southwest – Conquest (LSZ 1,2,3; Distance 521 feet)

As a result of the Update some array groups have been removed at VP13. The conclusion is that the VP13 simulation of the Project in the June 28, 2021 Application overestimates Project visibility.

This viewpoint generally represents a view of the south-central portion of the Project. VP13 is approximately 521 feet northeast of the Project fence line located on Spook Woods Road and is adjacent to two non-participating residences that will likely have views. Existing conditions show a maintained lawn framed by an existing residential structure and a section of forest. Further beyond, a transition to an open agricultural field occurs, followed by a swath of deciduous forest

and sloping topography that recedes towards the far background. Horizontal bands of lawn, field, forest and sky comprise the view.

The simulation shows panels in the view with a near distance offset of approximately 537 feet from the viewer, where array size and scale are diminished, and panels appear below the tree line. New form is introduced into the existing field, but the array mass is geometrically similar to horizontal shapes of green foreground grass and light brown open field. The arrays undulate with the existing terrain and appear nestled in place, drawing less attention and creating less contrast within the surrounding area. Array color is darker than the ochre-colored field. However, this color is also similar to background trees and other elements in the view and appears less impactful. While the arrays are visible in the field, the level of discernible detail is low, thereby weakening any texture contrast. Overall, average Project visual contrast is rated weakly moderate. Viewer groups affected are local motorists and residences. There is estimated to be a low number of viewers because of the rural location and approximately three residences in the near vicinity.

As noted above, the large setback from the arrays to the roadway (and nearby residences) moderates the size and scale of the arrays. Also, although the depth of the leaf-off trees in the right of the photo are substantial enough to block views, the arrays were not purposely sited here to specifically use the forested area for mitigation. The arrays were sited to accommodate the MWs required on an available participating landowner parcel and any existing vegetation with mitigative effects are incidental. However, it can be noted that the forested area in the right of the photo has been preserved to reduce the amount of tree clearing and to maintain the existing occurring natural landscape in the view.

There is vegetative mitigation for a residence farther down the road (left and out of the view) but no vegetative mitigation is proposed at this location. Vegetative plantings are typically placed at the fence line or at the edge of the Project parcel boundary. The land slopes up higher behind the fence line and would limit the effects of screening located at lower elevation if proposed in this location.

VP15a Slayton Road, View Northeast – Conquest (LSZ 1,3; Distance 134 feet)

The fence location in view has increased from 134 feet to 168 feet as a result of the Project Update. The fence line is now 34 feet farther away. The VP15a simulation of the Project in the June 28, 2021 Application now overestimates Project visibility.

VP15a is located at the central portion of the site on Slayton Road, approximately 134 feet from the Project fence line in the vicinity of several residences located west and south, out of view of the photo. The view faces northeast. This VP was chosen because it represents unobstructed Project views that may be experienced by two residences in closer proximity to the Project located behind the viewer. Existing conditions depict an open cultivated field that typically is comprised of corn-row crops but is currently fallow.

Due to viewer proximity, the clarity of the installation is high, ranging to weaker in the distance where panels break the horizon line across the view. The fencing and panels contrast strongly with the organic natural setting of the plain agricultural landscape. The arrays are the primary objects seen in the simulation from a close distance and are dominant in the view. Project Part 1 visual contrasts are rated as strong.

As depicted on the Landscape Plan drawings included in Appendix 11-2, the proposed mitigation for this location is intended to provide screening for approximately five non-participating residences in the vicinity (that are out of the view of the photo). The landscape plantings also serve to block views along the open roadway. Accordingly, it is expected that there will be partial views as the proposed landscaping grows to maturity as demonstrated in the simulation with mitigation at 5 years. With the inclusion of vegetative mitigation, views are softened and moderated as the trees and shrubs are more congruous with a natural environment and the Project color and value contrasts are reduced. Views of the mitigation for motorists will be intermittent and of short duration while longer duration views of the vegetative buffer will be obtained by residences.

VP16a Lake Road/State Route 38, View Northeast – Conquest (LSZ 1,3; Distance 545 feet)

There is both the removal and addition of solar arrays in this location as a result of the Project Update. Panels to be added will be placed in fields that already have arrays: additions consist of slight extensions of existing array string length. This occurs in the left upper field left of the road, and at small area that is south and east of the proposed access road in view in the field on the right side of the existing road. Removal of panels will occur at the location at the lower right of the simulation but is slightly out of the view extents. As each of these two fields on either side of the road are already heavily populated with solar arrays, it is concluded that the simulation of the Project in the June 28, 2021 Application adequately shows the conditions of the Project and would not change the conclusions regarding potential visibility.

This viewpoint generally represents a view at the western side of the Project. VP16a is on Lake Road approximately 180 feet west of the intersection of State Route 38. Route 38 can be seen in the photo middle ground going up the hill. The viewer is looking to the northeast and is approximately 545 feet from the Project fence line. Existing conditions show open field mixed with forested areas and a house at the top of the hill in the background. VP16a vantage point was chosen to show contextual landscape conditions in the vicinity of the house and also an area with snowmobile use. Table 24-4 indicates that seasonal private snowmobile trails are the only listed visual resources that may experience views of the Project. Discrete segments of NY State Snowmobile Association trail S55B runs through the area paralleling State Route 38 in the middle ground view.

Proposed conditions in the simulation show a portion of Project arrays in the fields on both sides of Route 38. The arrays follow the topographic contours and are seen sweeping down the hill. Some discernible detail is obtained at this viewing distance and the horizon line is only partially interrupted in the right of the simulation. Although the arrays occupy much of the view, they appear co-dominant against the size and scale in the view such as houses, forested areas, and utilities in the area and seemingly fit into the landscape. Some tree clearing is noted to the left of the simulation that exposes two lattice towers belonging to the NYPA Clay to Pannell 345-kV transmission line that cuts through the area. The arrays en masse are perceived as larger geometric shapes overall, that appear similar to the geometric field patterns seen in the view. The amount of color related to the solar panels in this view creates contrast. However, patterns of color exist throughout this view as a result of the various existing types of vegetation and blue sky.

Overall, average Project visual contrasts are rated as moderate. Viewer groups affected are local motorists and two residences in the vicinity.

As noted in the simulation and depicted on the Landscape Plan drawings included in Appendix 11-2, there is proposed Project mitigation that is intended to provide screening to the non-participating residence located at the top of the hill (right side of road), ~~as well as one seen in the far distance in the middle left~~. As observed in the simulation, the proposed landscape plantings occur on the right side of the road between the house on the hill and the solar arrays, as well as a vegetated buffer located on the left side of the road at the edge of the field. It is expected that this vegetative mitigation will provide screening and soften and moderate the views from residence locations, because the trees and shrubs are more congruous with natural vegetation.

Views of the mitigation for motorists will be intermittent and of short duration while longer duration views of the vegetative buffer will be obtained by the residences.

VP19 Cooper Street, View Northeast – Conquest (LSZ 1.3; Distance 200 feet)

VP19, in the middle portion of the Project, is representative of views that will be experienced along an adjacent rural road near one non-participating residence on Cooper Street, left and out of view in the photo. The view is looking northeast approximately 200 feet from the Project fence line. The existing conditions photo shows a light-colored cultivated field in the foreground and a wooded area in the middle to background. Also bisecting the view is NYPA's 345 kV Pannell to Clay transmission line and large lattice towers.

The Project provides new shapes of color change from light to dark. The colors of the fence line mirror that of the utility towers and access road. However, the amount of color depicted by the solar panels creates contrast with the various types of existing vegetation. New form is introduced into the existing open field but the horizontal nature of shape as a whole is similar to the background trees. New line is introduced into the landscape, but the line mimics several landscape features such as the field edges and horizontal lines of landscape features across the view. The Project may have some lateral breadth but overall is low profile compared to trees and large electric utility infrastructure and appears co-dominant in the view. As such, the line and color of the vertical utility towers and the background wooded area help to reduce visual contrasts. The panels directly in front of the viewer are close enough to allow for moderate to strong discernible detail while the array continues to the north and up the hill which decreases in detail as the distance increases with minimal vertical interruption of the horizon. Overall, average Project visual contrast is rated as moderate. Viewer groups affected are local motorists and one residence. There are expected to be a low number of viewers because of the rural road location and the one residence that might experience visual change.

There is proposed mitigation at the portion of the Project facing the road that is intended to provide screening to the one non-participating residence that is located across the road and perpendicular to the array locations (left of photo and out of view), as depicted on the Landscape Plan drawings included in Appendix 11-2. The landscape plantings will also serve to block views along the open roadway. Accordingly, it is expected that there will be partial views as the proposed landscaping grows to maturity as demonstrated in the simulation with mitigation at 5 years. The inclusion of vegetative mitigation softens and moderates the effects of the security fence and blocks some views of panels. A variety of ornamental, pollinator-friendly, small tree and shrub species are

incorporated throughout the planting scheme and provide a naturalized planting look that is aesthetically pleasing. Views of the mitigation for motorists will be intermittent and of short duration while longer duration views will be obtained by the residence.

VP61 Slayton Road, View West – Conquest (LSZ 1,3; Distance 783 feet)

A slight alteration of the fence line increases the distance to the viewer by 10 feet; from 783 feet to 793 feet away. Landscaping changes in the view of VP61 will occur to VM-9 in the vicinity of the proposed Project driveway. To accommodate for a driveway shift, 60 feet of landscaping will be shortened at the very western terminus of VM-9. Also, to address potential glare, numerous array groups will be removed. Approximately 1,380 feet of new additional landscape mitigation provided as VM 2-G is also proposed to address potential glare for residences on the south side of the Slayton Road as well as roadway travelers. VM 2-G is located on the west side of the driveway and will parallel the road. A slight fence location change will occur to the fence line closest to the viewer and this distance to the Project will increase by 10 feet. These changes are depicted in the Landscaping Plan in Updated Appendix 11-2. Following these changes, the conclusion is that the VP61 simulation of the Project in the June 28, 2021 Application overestimates Project visibility.

This viewpoint generally represents a view at the central portion of the Project. VP61 on Slayton Road is located approximately 783 feet east from the fence line in the view. VP61 was taken to represent a group of residences that are located on a higher section of road with westerly views to the Project. The existing conditions photo shows that the semi-foreground is mixed with dense evergreens to the left of the road and a large mature tree row to the right of the road while large horizontal shapes of open cultivated field and sky are in the background. It is expected that these existing trees will provide partial screening of the solar arrays as can be evidenced from the existing conditions photo. Prevalent in the view itself is Slayton Road as well as roadside utility distribution. The Project site in the background shows terrain that undulates slightly with a forested area in the far background that appears as a narrow horizontal band of darker value color.

New line is introduced into the landscape, but it is moderated by all of the other features with similar lines in the foreground such as scattered vegetation, pavement and utility distribution. Color contrasts of the arrays are moderate and are somewhat visually absorbed because there are both light and dark landscape features such as the trees and asphalt road that are similar. The Project has lateral breadth in the view but overall is low profile, fits in the landscape and appears co-dominant in the view. The panels are diminished in size and scale due to distance,

especially compared to the larger foreground shapes and darker colors. Distance also allows for minimal discernible details of the panels and fence line. A textured pattern is created by the rows and the angles of the solar panels that are not otherwise there. The existing linear road and utility poles in the foreground weaken the contrast of the solar installation. Project visual contrasts for the VP61 simulation are rated as weakly moderate.

There is no existing vegetation that is purposely being used to screen views, such as the foreground evergreen trees to the left nor the mature trees that are interspersed with some younger saplings that are right of the road. Any existing vegetation seen in the simulation that has the ability to block views is incidental. Despite existing trees and shrubs in the view, there is vegetative mitigation proposed along the fence line of the Project itself that is intended to provide screening for non-participating residences that are facing the arrays, as depicted on the Landscape Plan drawings included in Appendix 11-2. The mitigation also serves to block some views along the open roadway. Views of the Project for motorists will be intermittent and of short duration while longer duration partial views will be obtained by residences.

(7) Nature and Degree of Visual Change from Construction

Potential visibility during construction is anticipated to be minor and temporary in nature. Construction activities for a solar facility are site and project dependent. However, construction of a typical facility would normally involve the following major actions with potential visibility: building/upgrading roads; constructing laydown areas; removing some vegetation from areas of construction; transporting components and other materials and equipment related to the solar site; assembling the solar panels; constructing ancillary structures (e.g., collection substation, fences) and installing power-conducting cables (typically buried). Potential visual contrasts that could result from construction activities include contrasts in form, line, color, and texture resulting from road upgrading; construction and use of staging and laydown areas; vehicular, equipment, and worker presence and activity; dust; and emissions. These elements are quite typical of many major construction projects.

Construction visual contrasts would vary in frequency and duration throughout the course of construction. There may be periods of intense activity followed by periods with less activity and associated visibility would vary in accordance with construction activity levels. Construction schedules are project dependent.

(8) Nature and Degree of Visual Change from Operation

The information in this VIA provides an understanding of the visual relationship between the Project and its surrounding context. In depth compilation of computerized analysis results and corresponding discussion is provided throughout this Exhibit as well as in the VIA included as Appendix 24-1. The following provides a summary of findings and impacts related to the Project.

- (1) With the proposed Project Update, The-viewshed ~~analysis-analyses~~ results ~~objectively show that there is~~ minimal expected visibility of solar arrays (~~2.472.28~~%) within the overall VSA and there would be limited areas from which the Project would be visible but, in contrast, a multitude of areas from which it would not be seen. Overall, the majority of the visibility is predicted to occur within 0.5 miles of the arrays (~~2.322.18~~%).
- (2) As seen in the Appendix 24-1 mapping, the majority of visibility for the arrays occurs on properties belonging to participating landowners. The Project Area consists of 2,288.7 acres or 3.6 square miles. The Project Area is described as an acreage area encompassing all Project parcels located within the Town of Conquest. It is comprised of land that currently is either leased or owned by the Applicant and is therefore defined as properties belonging to participating landowners. With the proposed Project Update, ~~visibility~~ results ~~also~~ indicate that ~~4.751.63~~% of the total ~~2.472.28~~% visibility within the VSA occurs within the Project Area, and thus, on participating landowner properties. The remaining ~~0.720.65~~% of Project visibility will occur on non-participating landowner parcels.
- (3) The VSA was partitioned into designated distance zones and landscape similarity zones as required by Stipulation 24(b)(1).
 - (a) The VSA was partitioned into 3 distance zones each offering its own level of visual acuity as described in Exhibit 24(a)(1). These zones include: Zone 1 from 0 to 0.5 miles, Zone 2 from 0.5 to 2.0 miles and Zone 3 from 2.0 to 5.0 miles. Zone 1 had the highest percentage of visibility of ~~2.322.18~~% with the proposed Project Update, while there is an abrupt difference once outside of the 0.5-mile radius where percent visibility in the VSA drops to a negligible < 1%. This can be expected as there would reasonably be a concentrated amount of visibility in proximity to the Project. This also indicates the existing trees and forested areas provide effective screening to the Project.

- (b) There are five LSZ categories presented in Table 24-2. The presence of the highest LSZ percentages within the VSA are Zone 1 Agricultural and Zone 2 Forested at 45.52% and 43.70%, respectively.
- (c) The actual percent of visibility in LSZs is highest in Zone 1. ~~Table 5 in Appendix 24-1 shows that~~ With the proposed Project Update, 1.851.80% of land area in agricultural areas within 5 miles may experience visibility of the Project followed by 0.450.32% from forested areas. Developed areas resulted in 0.12% of the land area that is expected to experience visibility within 5 miles. The open category results in 0.04% visibility while Open Water has no visibility.
- (4) The viewshed visibility analysis geographically shows where predicted visibility is expected to occur. There are forested areas, along with the topography of the rolling hills along with geologic drumlin hill features in the area that provide much screening and preclude many views of arrays as noted on the maps. Viewshed maps show the majority of visibility that is expected to occur mostly in a focused location within the Project Area inside of the 0.5-mile Distance Zone 1 and more than a majority of visibility is from participating landowner parcels. Visible areas include the Project parcels themselves and at a few roadways, open fields, and nearby properties. Although the panels are sited in open land against forested areas, the low-profile panels set against existing tree buffers, hedgerows, and tree groups that frame the panel locations is enough to obscure many outward views.
- (5) One Article 10 listed visual resource outlined in Table 24-4 will have views of the Project and include small segments of private snowmobile trails designated as S55B and S55D located in Conquest near NY State Route 38, Cooper Street, and Drake Road as they approach the vicinity of the existing powerline. Snowmobile travel will be seasonal, intermittent, transient, and will experience partial views of arrays.
- (6) The local community will experience partial views of the Project. Several segments of local roadways running through the interior of the Project as well as perimeter roads may experience transient views from vehicular traffic. Much of this visibility along intermittent road segments is within 0.5 miles in Distance Zone 1 and include those such as Cooper Street, Slayton Road, Spook Woods Road, Montana Road, Oneil Road, Drake Road, Field Farm Road, and State Route 38. Entire roads will not have visibility. Visibility maps in

Appendix 24-1 further illustrate which segments of road may experience views of the Project. Vegetative mitigation proposed for these locations is explained above.

It is expected that the number of static (longer duration) viewers able to see the Project is low due to the rural nature of the Project location in addition to the presence of mosaicked tree groups in the area that screen views. However, there will be house locations with views, but vegetative mitigation is proposed to screen residence's views of the Project. Road views at several nearby residences along these roads are represented in the Project photosimulations such as VP4b, VP7, VP12, VP13, VP15a, VP16a, VP19, and VP61.

- (7) Photosimulations showing existing and proposed conditions including proposed mitigation have been produced. The general visual appearance of the low-profile panels as a group contribute to a homogenous form which consists of a new horizontal pattern often similar in color, shape, and size to the landscape features found in many views. Color differences between the Project and the landscape may provide contrast but will vary throughout the seasons. Overall Project contrast and the overall visual effect will vary depending on the extent of panel visibility (partial or full), distance of the arrays from the viewer, and if the panels are seen in the context of other existing noticeable modifications to the local natural landscape. In some instances, background vegetation seen behind the Project moderates visual contrast, because the arrays are perceived to be visually absorbed by similar color and color value expressed by the background trees.
- (8) A discussion of Project visual contrasts in greater detail can be found in Exhibit 24(b)(1). Project contrast ratings were applied for the unmitigated simulations against existing conditions. Seven simulations had Project visual contrast ratings that are weakly moderate to moderate. One simulation, VP15a on Slayton Road, was rated as strong due to the proximal location to the Project that lacks some of the moderating effects such as offset distance and background trees. Viewer sensitivity contrasts were rated as very weak or weak due to the low populated rural nature of the area in addition to the fact there are no simulation locations that are within an Article 10 listed resource except for a seasonal private snowmobile trail at VP16a.

Proposed mitigation can be seen in the simulations showing a 5-year time frame. With the inclusion of the landscape plantings, contrasts are softened and moderated as the trees and

shrubs are more congruous with the existing environment and the Project color and value contrasts are reduced.

(9) As noted in finding #6, vegetative mitigation is proposed to screen residence's views of the Project. Proposed landscaping described in Exhibit 24(a)(10) will consist of three planting template schemes, each with a variety of evergreen trees and shrubs that will provide year-round screening. Visual Project contrast from solar panels is anticipated to be avoided or minimized in areas where landscaping is proposed. The Applicant proposes approximately ~~28,600~~25,405 linear feet of vegetative mitigation along the Project fence line at or near residential properties for purposes of Project visibility screening. An additional 670 linear feet of landscape plantings are proposed at the collection substation location. Also, an additional 4,245 feet of landscaping is proposed to mitigate potential glare impacts for a total of 30,320 feet of vegetative landscape plantings.

(10) Due surrounding forested area locations, visibility analysis shows that the collection substation and switchyard will not be visible from most areas in the vicinity as well as within the overall VSA. Exhibit 24(a)(3) discusses visibility solely from collection substation components in the absence of arrays. The majority of visibility for both upper electrical components between 56 and 101 feet in addition to lower components 37 feet or less occurs within the Project Area thus defined as participating landowners.

LOS profiles in Appendix 24-1 illustrate how or why the collection substation is visible or not visible and also shows the proposed mitigation for it. Proximal locations east and from adjacent Cooper Street will have open views to the collection substation from vehicles traveling on the roadway represented by Profile L1. However, Profile L2 at a nearby residence on Cooper Street shows that proposed landscape mitigation along the side of the road is expected to screen views. As one proceeds southwesterly, represented by Profile L3, views will be blocked by an existing forested area.

The collection substation will be adjacent to the existing NYPA 345 kV Pannell to Clay transmission line which consists of approximately 90-foot tall lattice towers. The collection substation and switchyard will be integrated within this compatible infrastructure where lattice towers will generally be in the views in and along with the proposed collection substation.

One residence is located adjacent to the parcel where the collection substation and switchyard is proposed. To mitigate potential views of these interconnection facilities, the Applicant is proposing

a special planting template in this area (see Type 3 planting template on landscape drawing in Appendix 11-1). This special planting template includes a solid row of evergreen species including eastern red cedar, white spruce, and blue spruce species along with a mix of deciduous tree species and shrubs in order to provide maximum visual screening.

Other factors assessing the degree of visual change from the Project can be considered other than percentages of visibility or observations and results obtained from computer-based analyses, and include:

- Project Facilities are set back from property lines and/or behind forested areas resulting in reduced visibility and less disturbance surrounding agricultural activities on adjacent parcels.
- Through the use of efficient solar panels, the Applicant is able to limit the ground cover required to achieve its objective of 200 MW generating capacity. Additionally, solar facilities typically result in a minimal amount of ground disturbance for the installation of racking and mounting posts thereby preserving the ability to use the land for agricultural purposes in the future following decommissioning.
- The AC collection lines will be placed underground and installed primarily via direct burial or trenching with some portions to be proposed via HDD in order to avoid wetland resources and roadways.
- While the Project area consists of many pastoral views, landscape features are similar to each other and landscape characteristics are typical of what you would find in a rural area in this part of New York. The Project will not impair these surrounding regional landscape characteristics.
- The Project will not always appear as a dominant feature in a view within the VSA.
- There will be no interference with the general enjoyment of recreational resources in the area due to the fact that most visual resources are at a distance from the Project with only two private snowmobile trails running through the area that are expected to have intermittent and short-duration views. There is limited to no long-range visibility overall in the VSA.

- The Applicant has employed reasonable mitigation measures to the maximum extent practicable with respect to the overall design and layout of the proposed Project as well as the proposed vegetative plantings that screens views to nearby residents.
- Vertical scale of solar arrays is typically not an issue in relation to surrounding features such as trees, hills, and barns. Lateral extent may be an issue if the arrays appear to overwhelm a ridgeline, scenic water body, or cultural feature that appears diminished in prominence. The Project solar arrays, considering their layout, spacing and the topography and resources in the area, do not overwhelm such physical geographic areas.
- Visual clutter often is adversely perceived and commonly results from the combination of human-made elements in close association that are of differing shapes, colors, forms, patterns, or scales. Generally, solar facilities offer simple and uniform or geometrically patterned arrays or groupings that may be more visually consistent than mixed types and sizes of objects. Landscape mitigation also assists in diminishing visual clutter and offering consistency to the view.
- Aside from normal low local road traffic (see also AADTs in Table 2 of Appendix 24-1 VIA), the public areas in the vicinity to the Project Area with predicted visibility are not exceedingly high-use destination areas.
- The Project does not have an adverse effect on a known listed scenic vista.
- The Project does not damage or degrade existing scenic resources.
- The Project does not create a new source of substantial light that would adversely affect nighttime views in the area. Potential glare from the solar modules and associated equipment would be negligible because they would consist of a non-reflective coating.

(9) Analysis of Operational Effect

The Project is not predicted to emit glare into the existing environment. Panels are designed to absorb sunlight and will be treated with anti-reflective coatings that will absorb and transmit light rather than reflect it. In general, solar panels are less reflective than window glass or water surfaces (NYSERDA, 2019), any reflected light from solar panels will have a significantly lower intensity than glare from direct sunlight (Mass. Department of Energy Resources, 2015), and

studies show that the reflections produced are significantly less than reflections from glass and steel.

Nevertheless, the Applicant retained Pager Power to prepare a Solar Photovoltaic Glint and Glare Study for the Project that is included as Appendix 24-2. Pager Power has undertaken over 600 glint and glare assessments in the UK, Europe, the USA, and internationally. The company's own glint and glare guidance is based on industry experience and extensive consultation with industry stakeholders including airports and aviation regulators.

Pager Power's approach is to undertake geometric reflection calculations and, where a solar reflection is predicted, undertake solar intensity calculations in line with the Sandia National Laboratories' FAA methodology. The scenario in which a solar reflection can occur is identified and discussed, and a comparison is made against the available solar panel reflection studies to determine the overall impact. As outlined in Appendix 24-2, the glint and glare assessment methodology has been derived from the information provided to Pager Power through consultation with stakeholders and by reviewing the available guidance and studies. The methodology for a glint and glare assessment is as follows:

- Identify receptors in the area surrounding the solar development (residences and roads).
- Consider direct solar reflections from the solar development towards the identified receptors by undertaking geometric calculations.
- Consider the visibility of the panels from the receptor's location. If the panels are not visible from the receptor, no reflection can occur.
- Based on the results of the geometric calculations, determine whether a reflection can occur, and if so, at what time it will occur.
- Consider both the solar reflection from the solar development and the location of the direct sunlight with respect to the receptor's position.
- Consider the solar reflection with respect to the published studies and guidance.
- Determine whether a significant detrimental impact is expected in line with the process presented in Appendix D of the Pager Power report included as Appendix 24-2.

It should be noted that the model is conservative in that it assumes clear, sunny skies for 365 days of the year and does not take into account meteorological conditions that would nullify predicted glare such as clouds, rain or snow.

Within the Pager Power model, the solar development area is defined, as well as the relevant receptor locations. The result is a chart that states whether a reflection can occur, the duration, and the panels that can produce the solar reflection towards the receptor. Where an impact significance of moderate or high is determined, recommendations for mitigation have been provided.

Overall, mitigation ~~has been~~was recommended for seven dwellings and three sections of Cayuga County Route 17B (Slayton Road) where a moderate impact was predicted. The Landscaping Plan (Appendix 11-2) has been updated to depict the installation of landscape screening to mitigate the potential for glare for accordingly. These areas correspond with Figures 40-43 and 45-49 on pages 99-104 of the Page Power report where mitigation is recommended. ~~For one section of road located along Cayuga County Route 17B, a high impact has been predicted and Pager Power recommends that mitigation is required.~~ The measures required to mitigate these areas of predicted glare include the installation of additional landscape buffers (beyond those that were proposed originally for visual mitigation purposes) to the maximum extent practicable. Please refer to the Updated Appendix 11-2 for glare mitigation . For one section of road located along Cayuga County Route 17B, a high impact has been predicted and Pager Power recommends that mitigation is required. The Civil Site Plan sheets C.312 and C.313 have been updated to remove the solar arrays in the area of potential high impact glare identified along Cayuga County Route 17 B (Slayton Road) per the recommendation of Pager Power as indicated on Figure 44 on page 101 of their report. ~~for areas predicted as moderate impacts and the removal of arrays in the area of high impact. The Applicant will follow the recommendations outlined in the report and has prepared standalone landscape and site plan drawings to indicate how these mitigation measures will be included into the site's design.~~

~~Refer to Appendix 24-3 to see the proposed glare mitigation measures. The Civil Site Plan sheets C.312 and C.313 dated 06/01/2021 have the solar arrays removed in the area of potential high impact glare area along Cayuga County Route 17 B (Slayton Road) per the recommendation of Pager Power as indicated on Figure 44 on page 101 of their report. The Landscape Plan Glare Additions drawings dated 06/2021 depict the installation of landscape screening to mitigate the potential for glare for the seven dwellings and three sections of Cayuga County Route 17B that~~

~~were predicted to have a moderate impact. These areas correspond with Figures 40-43 and 45-49 on pages 99-104 of the Pager Power report where mitigation is recommended.~~

By proposing these mitigation measures, the Project will have minimized the potential for glare impacts to the maximum extent practicable. Refer to the Pager Power report in Appendix 24-2 for complete details on the analysis.

(10) Measures to Mitigate for Visual Impacts

Mitigation includes siting and design and vegetative plantings to help moderate visibility.

When a solar facility is decommissioned and removed, the land can be returned to other productive use, including farming. In this way, a solar lease can be a way to preserve land for potential future agricultural use. Large-scale solar projects can be made less visible from roads or other public vantage points. Several approaches for minimizing and mitigating visibility from large-scale solar projects can be made such as keeping facility components at low profile and siting and designing the site to take advantage of natural topographic and vegetative screening; road setbacks; siting against tree lines; and avoiding the use of overhead interconnection lines.

Siting and Design

Current siting is optimized to minimize visibility of the project by placing, orienting, or arranging the arrays in certain ways. Siting against existing vegetation such as tree lines and utilizing sufficient setback distances are effective in reducing visibility.

Siting layout and design considerations that offer mitigation are summarized as follows:

- Use of existing vegetation such as the surrounding woodlands and hedgerows as existing visual barriers as much as possible.
- Panels proposed against background trees to reduce visual contrasts, as color contrasts are absorbed and moderated by the background trees.
- Setbacks and offsets: The Project's alignment has been designed to incorporate and abide by and/or exceed the minimum property and building setback distance requirements for the Town of Conquest (see Exhibit 31 for more detail). The Applicant utilized minimum setbacks of 100 feet to non-participating residential property lines, 50 feet to public road right of ways, and 250 feet to non-participating occupied residences.

- Use of antireflective coatings on solar panels. Solar photovoltaic panels are also designed to absorb light, not reflect light, and therefore, produce minimal, if any, glare.
- Racking systems consist of non-reflective metallic materials.
- General site location placed far from sensitive resources listed addressed in the Stipulations 1001.24 listed visual receptors.
- The Project has been sited away from the population centers in order to minimize potential visibility by a relatively larger number of viewers.
- The collection substation and switchyard are located proximal to the existing transmission right of way for minimally distant new interconnects.
- The collection substation is located near in-kind utility infrastructure.
- Vegetative buffers: plantings of native/indigenous pollinator-friendly plant species are included in the proposed landscape mitigation plan.
- Collection lines have been placed underground to decrease additional aboveground Project visibility.
- Minimized vegetation clearing outside of the arrays in order to preserve existing trees and other vegetation for Project screening to the best extent possible.

Vegetative Mitigation

From a scenery point of view, methods and techniques of hiding/screening solar farms can be effective in moderating views. Typically, a landscape planting scheme is developed to provide year-round screening that is sustainable, hearty, and resilient. The vegetative screening will primarily use native/indigenous plant species incorporated with opaque evergreen tree species to help minimize views into the project site. Additionally, a variety of ornamental, pollinator-friendly, small tree and shrub species are incorporated throughout the planting scheme as well. This approach will provide a more naturalized planting look that is aesthetically pleasing and compliments the surrounding area.

The Landscaping Plan for vegetative mitigation can be found in [Updated](#) Appendix 11-2 of Exhibit 11. The following items and concepts were applied to the plan:

- Native/indigenous evergreen trees and pollinator-friendly deciduous shrubs and small ornamental tree species were selected for the vegetative buffer. The species chosen will

need to reach an adequate height and width to provide the appropriate visual screening required while also maintaining minimum mature heights that will not produce shade over the Project in later years. Deciduous and evergreen tree species include balsam fir (*Abies balsamea*), northern white cedar (*Thuja occidentalis*), white spruce (*Picea glauca*), flowering dogwood (*Cornus florida*), and downy shadbush (*Amelanchier arborea*). Shrub species include red chokeberry (*Aronia arbutifolia*), red twig dogwood (*Cornus sericea*), common witch hazel (*Hamamelis virginiana*), American cranberry (*Viburnum trilobum*), common winterberry (*Ilex verticillata*), and highbush blueberry (*Vaccinium corymbosum*).

- The plantings are proposed along the outside fence line or at property boundaries in locations noted on the Landscaping Plan in Updated Appendix 11-2. Three planting types are proposed for an approximate total of 28,60025,405 linear feet of vegetative mitigation around the arrays and another 670 feet at the collection substation:
 - Mitigation Planting Template Type 1: This planting scheme provides a density of plantings that will be considered a typical visual screening effort for this Project. Approximately 26 evergreens per 300 feet of linear planting are proposed among the deciduous species. Type 1 plantings will be utilized/implemented along 25,60023,495 linear feet (9092%) of the Project.
 - Mitigation Planting Template Type 2: This planting scheme provides a density that is considered a supplemental screening effort in areas where visual impacts do not demand as robust of a planting effort. Approximately 11 evergreens per 300 feet of linear planting are proposed among the deciduous species. Approximately 3,0001,910 linear feet (408%) of Type 2 plantings are proposed to be used within the Project site.
 - Mitigation Planting Template Type 3: This planting scheme provides the highest density of plantings specifically at the proposed collection substation to screen views to nearby residences. Approximately 38 evergreens per 300 feet of linear planting are proposed among the deciduous species. Blue spruce (*Picea pungens*) is proposed to be planted as a part of Planting Template 3 only. There will be 670 linear feet of the Type 3 planting at the collection substation site.
- An additional 4,245 feet of mitigation will be provided to screen potential glare with 2,990 linear feet of Type 1 plantings and 1,255 linear feet of Type 2 plantings.

- A grass seed mix using native/indigenous warm and cool season grasses was developed especially for the areas under and around the solar array fields and is considered favorable for wildlife habitat and sustainable growth. The seed mix will provide a groundcover that minimizes erosion concerns, does not pose any shading issues, and is manageable year-round. Updated Appendix 11-2 of Exhibit 11 identifies the species that are included in the grass seed mix.
- Expected growth heights (depending on the specific tree or shrub species) are expected to be between 5 to 15 feet at 5 years. However, fully mature heights of the year-round coniferous species may reach up to 40 feet high.
- It is important to note that an annual O&M (Operation and Maintenance) effort will be provided to ensure that proper care and attention is given to the proposed plantings once they have been installed. Annual O&M efforts will include, but not be limited to, selective pruning, mowing, and monitoring of invasive species. Additionally, landscaping notes in the Landscaping Plan will provide further direction, recommendations, insight, and guidelines to ensure a healthy, viable, and sustainable landscape throughout the life cycle of the Project to the maximum extent practicable.

(11) Description of Visual Resources to be Affected

Exhibit 24(b)(4) discusses the visual resources in the 5-mile VSA and includes Table 24-4 that indicates the distance of resources to the Project as well as the potential visibility from each resource. Mapped locations of the resources can be found in Attachment 2 of Appendix 24-1.

24(b) Viewshed Analysis

(1) Viewshed Maps

A viewshed analysis is a computerized GIS analytical technique that illustrates the predicted visibility that may potentially be expected for a project. It allows one to determine if and where objects, such as a solar array, can geographically be seen within a larger regional area. The viewshed model accounts for topography, vegetation, and the height of the solar panels. The results of the viewshed analysis, typically displayed over a USGS topographic map or aerial photo, are combined with other Article 10 listed visual receptors such as historic places, national forests, or state parks, etc. Incorporating GIS integrated data along with a viewshed analysis assists in understanding the potential for Project visibility at sensitive resource locations. Refer to

Attachment 2 of Appendix 24-1 [and Figure 24-1](#) for maps depicting the result of the viewshed analysis.

(2) Methodology

The viewshed analysis results show areas of expected visibility. For the analysis, Light Detection and Ranging (LiDAR) point cloud data from the 2018 Cayuga/Oswego County New York LiDAR dataset and obtained from the New York State GIS Program website was used. LiDAR data is the best available elevation data as it includes high resolution accurate ground elevations in addition to building heights and individual tree heights that offer realistic physical visual impediments as they occur in the landscape.

The proposed panels for this Project will have a fixed racking system with array heights up to 11 feet. However, as noted in Exhibit 24(a) for the viewshed analysis, the top of the panels with the viewshed model were conservatively set at a maximum of 18 feet in height above ground surface (e.g. full tilt tracking system) to include assessment for photovoltaic models that may become available in the future.

The viewshed model was further developed by establishing an observer height of 6 feet and the assumption that the Project would not be visible to a viewer who is standing among trees in a forested area for the viewshed analysis that incorporated trees. The final resulting output identified those areas from which viewers would potentially see all or some part of the proposed solar panels. Esri Spatial and 3D Analyst GIS software were used to develop the viewshed model.

(1) Two viewshed analyses for the solar arrays have been produced to illustrate predicted visibility within the VSA:

- With Vegetation and Buildings: This is the primary visibility analysis performed per Stipulation 24 (b)(1), as it incorporates trees and buildings in the study area in addition to topography and gives the most reasonable and realistic depiction of the surrounding Project landscape. The results of this analysis provide the focus of visibility discussion in visual impact assessments because of the inherent aspects of reproducing realistic conditions when LiDAR datasets are used.
- Topography-Only: A topography-only viewshed analysis was also performed. The viewshed analysis with bare earth topography is not recognized as being a realistic representation of potential visibility, as it is not truly reflective of the environment

due to the absence of all trees. Despite this limitation of the topography-only analysis, it can be a useful tool in allowing an understanding of how much of the Project is blocked by terrain alone. Another caveat is that the topography-only results must not be interpreted as representing visibility during leaf-off conditions, since even leaf-off bare branched tree groups act as a solid mass where lines of sight to objects can be screened. VPs 6, 8, 10, 16a, 19, 21, 22a, 41, 42, 47, 48, 51, and 56, in the Appendix 24-1 Project Photolog, are a few examples of how much visibility can be impeded even during leaf-off conditions, and thus serve to act more like the analysis using trees than topography alone. Under certain circumstances, there may possibly be visibility through bare-branched trees only if the trees are sparse, if this sparse tree row is the only existing vegetation between the viewer and the site, and if the viewer is in fairly close proximity to the Project.

The bare earth topography-only analysis is also typically performed to assist a separate historic architectural survey investigation (Survey) which is led by other cultural resource experts. The topography-only methodology and results pertaining to visibility of historic resources from the Survey is specific to the guidance, performance standards, and agreements with the NYS Office of Parks, Recreation, and Historic Preservation (OPRHP) that is not inclusive for Exhibit 24. Details of bare earth topography visibility results pertaining to this policy is addressed and discussed further in Exhibit 20 along with the Historic Architectural Resources Survey and Effects Report. Any additional architectural survey properties discovered as a result of the Survey that is above and beyond the data that was provided by the New York State Historic Preservation Office (SHPO) in October 2020 and included herein, can be found in Table 24-4 and Appendix 24-1 mapping.

(2) Two viewshed analyses separate from the arrays were completed for the collection substation.

- Collection Substation: Two viewshed analyses were produced using the same LiDAR data and the same methodology as that of the solar arrays. One viewshed analysis was performed with the tallest components of the collection substation that included 101-foot tall surge arrestors at the switchyard, several 76-foot high dead-end structures at the substation, and three 56-foot lightning masts within the fence line. Since much of the collection substation is comprised of electrical

components with less vertical height, a second viewshed analysis was performed that included transformers, bus equipment, and breakers that range from 23 to 37 feet tall. A control building is proposed that will be 17 feet tall.

Assumptions and Limitations of the Viewshed Model

The viewshed analysis identifies cells (image pixels) that contain elevation information and computes the differences along the terrain surface between an observer in the landscape and a target (e.g., a solar panel). The analysis is a clear line of sight. Therefore, certain factors in the interpretation of results need to be considered:

- (1) The model, because of its computerized aspect, assumes the observer to have perfect vision at all distances. Therefore, a certain amount of reasonable interpretation needs to be considered because of the limitations of human vision at greater distances or those atmospheric/meteorological conditions that may cause imperfect vision, such as haze or inclement weather. Additionally, an object is naturally smaller and shows much less detail at distances and will have less visual impact. These aspects cannot be conveyed with this analysis.
- (2) Because an area may show visibility, it does not mean the entirety of the Project will be seen. The viewshed analysis depicts areas of visibility over a regional area. It can only predict geographically on a map, areas where some part of the solar panels might be seen. It does not and cannot determine if it is seeing a full-on view or a partial view. Additionally, if visibility is occurring in an area, it may sometimes only be a result of glimpsing a portion of the Project over undulating treetops between gaps of trees, or visibility of the tops of panels and not a full-on view. Likewise, there may be understory tree gaps where there may be visibility of the Project.
- (3) The model was developed with the assumption that a viewer would not see the panels if standing among trees in forested areas as it is assumed the tree canopy would preclude outward-looking views.

(3) Viewer Groups Overview

Sensitivity levels are a measure of public concern for scenic quality. Visual sensitivity is dependent upon user or viewer attitudes, the amount of use and the types of activities in which people are engaged when viewing an object. Overall, higher degrees of visual sensitivity are

correlated with areas where people live and with people who are engaged in recreational outdoor pursuits or participate in scenic driving. Conversely, areas of industrial or commercial use are considered to have low to moderate visual sensitivity because the activities conducted are not significantly affected by the quality of the environment.

These concepts are applied when evaluating the visual landscape and assessing the importance of a viewpoint location if it falls in an area of visibility. Viewer groups and associated responses to visual changes are analyzed from a variety of factors including:

Viewer group – Types of viewers will vary by geographic region, as well as by travel route or use areas, such as a developed recreation site, urban area, or back yard. Viewer groups include:

- *local constituency* - People living in the local area and/or surrounding communities who interpret the significance of where they live and interact with others. These people may include local residents and members of groups to which the local area is important in different ways.
- *commuter constituency* - People who use or are generally restricted to travel corridors that are destination oriented towards places of employment. These people generally have transient short duration views.
- *visitor or recreational constituency* - Individuals who visit the area to experience its natural appearance, cultural landscape qualities or recreational opportunities. Visitors may be of local, regional, or national origin.

Context of viewer - The viewer group and associated viewer sensitivity is distinguished among viewers in residential, recreational/open space, tourist commercial establishments, and workplace areas, with the first two having relative high sensitivity.

Number of viewers - The number of viewers is established by the amount of people estimated to be exposed to the view. In comparing viewing locations to each other, one can consider if the area is a high public use area or if it is a location that is less frequently visited or more inaccessible where the public is not expected to be present (such as marshes or swamps).

Duration of view - Duration of view is the amount of time a viewer would actually be looking at a particular site. Use areas are locations that receive concentrated public-use viewing with views of long duration such as residential back yards. Recreational long duration views include picnic

areas, favorite fishing spots, campsites, or day use in smaller local parks. Comparatively, drivers, hikers, snowmobilers, or canoeists will likely encounter a shorter, more rapid transient experience as a person transitions from one linear segment to the next but will encounter more visually varied experiences.

Viewer activities - Activities can either encourage a viewer to observe the surrounding area more closely (hiking) or discourage close observation (commuting in traffic).

(4) Scenic Resources Inventory

An inventory of publicly available and accessible local, county, state, and federally recognized visual resources out to the 5-mile VSA was compiled under Stipulation 24(b)(4)(ii). GIS data, town, county, and agency reports, topographic data, and site visits along with photographic documentation were used as source data. Also, on January 27, 2021, an information request was sent out to stakeholders per Stipulation 24(b)(4). In this request, a preliminary visual report was provided, indicating the extent and findings of visibility studies at that point in time that included identified visual resources. Opportunity was provided for stakeholders to append additional visual resources of concern to the inventory. The New York State Department of Public Service (DPS) responded, and in a memo dated February 10, 2021, provided additional visual receptors to include in the inventory. Correspondence is available in Attachment 5 of Appendix 24-1.

Per Stipulation 24(b)(4)(ii), the following have been reviewed for their appearance within the VSA:

- (1) Landmark landscapes;
- (2) Wild, scenic or recreational rivers;
- (3) Forest preserve lands, scenic vistas specifically identified in the Adirondack Park State Land Master Plan, conservation easement lands, scenic byways designated by the federal or state governments;
- (4) Scenic districts and scenic roads;
- (5) Scenic Areas of Statewide Significance;
- (6) State parks or historic sites;
- (7) Sites listed on National or State Registers of Historic Places;
- (8) Areas covered by scenic easements, public parks or recreation areas;
- (9) Locally designated historic or scenic districts and scenic overlooks; and,

(10) High-use public areas.

Information for historic sites and districts, listed New York historic sites, National Register of Historic Places (NRHP), and eligible historic properties was obtained directly from SHPO as part of a specific Applicant request made on October 6, 2020. In February 2021, a historic architectural survey was conducted by the Applicant within a 2-mile Area of Potential Effect (APE) to fulfill Exhibit 20 requirements under SHPO guidelines. As a result of this survey, six properties above and beyond what SHPO provided in the October 6th Applicant request for listed and eligible sites are recommended for NRHP status: one property where the previous status was “Undetermined” by SHPO, and five new surveyed sites. These six sites are listed in Table 24-4 and noted in the Appendix 24-1 mapping. Please refer to Exhibit 20 of the Application as well as the Historic Architectural Resources Survey and Effects Report for greater detail on the cultural resources investigations and results.

Table 24-4 provides the results of this investigation listing the resources found within the full 5-mile VSA with other information regarding location characteristics such as distances and potential for visibility.

Table 24-4. Inventory of Visual Resources within the Five Mile VSA

Map ID	Resource Name	Town/Village	Distance to Project (miles)	LSZ	Potential Visibility ¹
	Parks/Recreation				
1	Graham Park	Brutus	4.0	1,2	No
2	Public School Playing Fields	Brutus, Village of Weedsport	4.5	4	No
3	River Forest Park	Brutus	2.6	2,4	No
4	River Forest Park Campground	Brutus	3.1	3	No
5	Trolley Park	Village of Weedsport	4.5	3	No
6	Weedsport Speedway	Brutus	4.4	3	No
7	Conquest Recreation Field	Conquest	0.4	4	No
8	Duck Lake Campgrounds	Conquest	1.9	3,4	No

Table 24-4. Inventory of Visual Resources within the Five Mile VSA

Map ID	Resource Name	Town/Village	Distance to Project (miles)	LSZ	Potential Visibility ¹
9	Howland Island State Wildlife Management Area	Conquest	3.1	1,2	No
10	CIMARF - Cato, Ira, Meridian Area Recreation Facility	Ira, Village of Cato	1.9	3	No
11	Schasel Park	Village of Port Byron	4.1	3	No
12	Mott Park	Village of Cato	1.5	3	No
13	Whitford's Airport	Cato	3.9	4	No
14	Eagles Landing Marina	Brutus	3.9	5	No
Lakes and Boat Launches					
15	Otter Lake	Cato	3.2	5	No
16	Parker Pond	Cato	2.4	5	No
17	Duck Lake	Conquest	1.7	5	No
18	Erie Canal - Seneca River (Hand) Boat Launch	Brutus	4.9	5	No
19	Otter Lake Boat Launch	Cato	3.5	5	No
20	Cross Lake Boat Launch	Cato	4.7	5	No
21	Erie Canal - Seneca River Boat Launch	Mentz	1.8	5	No
22	Erie Canal Ramp	Conquest	3.3	5	No
Cemeteries					
23	God's Acre Cemetery	Village of Weedsport	4.6	3	No
24	Saint Joseph's Cemetery	Village of Weedsport	3.8	3	No
25	Crosman Cemetery	Cato	4.0	1	No
26	La Due Cemetery	Cato	2.7	1	No
27	Meridian Village Cemetery	Village of Meridian	3.3	3	No
28	Smith Road Cemetery	Cato	2.2	4	No
29	Conquest Village Cemetery	Conquest	0.3	4	No

Table 24-4. Inventory of Visual Resources within the Five Mile VSA

Map ID	Resource Name	Town/Village	Distance to Project (miles)	LSZ	Potential Visibility ¹
30	Emerson Cemetery	Conquest	0.1	4	No
31	Spring Lake Cemetery	Conquest	1.7	4	No
32	Dutton Cemetery	Ira	3.1	4	No
33	Ferris Cemetery	Ira	4.6	2	No
34	Union Hill Cemetery	Village of Cato	2.5	3	No
35	Dixon-Wilson Cemetery	Mentz	4.5	1	No
36	Mount Pleasant Cemetery	Village of Port Byron	4.5	3	No
37	Old Port Byron Cemetery	Village of Port Byron	4.1	3	No
38	Salt Road Cemetery	Mentz	4.5	1	No
39	Stevens Family Cemetery	Mentz	3.4	2	No
40	Cummings Cemetery	Victory	4.2	2	No
41	French Cemetery	Victory	4.2	1	No
42	Victory Union Cemetery	Victory	3.2	4	No
Local Designated Scenic Features					
43	Scenic Drumlin Feature	Village of Weedsport	4.5	2	No
44	Scenic Drumlin Feature	Brutus	4.7	2	No
45	Scenic Drumlin Feature	Brutus	5.0	2	No
Wildlife Management Areas					
NA	Howland Island State Wildlife Management Area	Conquest, Montezuma	1.9	1,2	No
NA	Northern Montezuma Wetlands State Wildlife Management Area	Conquest, Savannah	2.3 ²	1,2	No
Scenic Byways					
NA	NY State Route 34 Scenic Byway	Cato, Ira	1.5	1,2,3	No

Table 24-4. Inventory of Visual Resources within the Five Mile VSA

Map ID	Resource Name	Town/Village	Distance to Project (miles)	LSZ	Potential Visibility ¹
Heritage Corridor					
NA	Erie Canalway National Heritage Corridor	Towns of Brutus, Cato, Conquest, Mentz, Montezuma, and Savannah are within Heritage Area boundary	n/a	1,2,3,4,5	No
Bikeways, Trails and Waterways					
NA	Erie Canal Trail (State Bikeway Route 5 & Erie Canal Trail is the same in some areas)	Brutus, Mentz, Village of Port Byron, Village of Weedsport	3.9	2,3,4,5	No
NA	Cato-Fairhaven Trail (North Trail)	Ira, Village of Cato	2.1	1,2,3	No
NA	Erie Canalway Greenway	Cato	1.6	1,2,5	No
NA	Muskrat Creek Canoe-Kayak Trail	Cato	1.9	1,2,5	No
NA	Future Rail Trail	Cato, Village of Cato	2.0	1,2	No
Snowmobile Trails					
NA	Cato Trailblazers Club, Port Byron Snow Panthers (NYS Snowmobile Association Members) Trails S55B and S55D.	Brutus, Cato, Conquest, Ira, Mentz, Victory, Village of Cato, Village of Port Byron	0	1,2,3,4	Yes, discrete segments of trail in Conquest

Map ID	USN	Resource Name	Town/Village	Distance (miles)	LSZ	Potential Visibility*
Listed Historic District						
N/A	00104.000641	New York State Barge Canal Historic District	Brutus, Cato, Conquest, Mentz, Montezuma	1.8	5	No

Map ID	USN	Resource Name	Town/Village	Distance (miles)	LSZ	Potential Visibility*
Cultural Resource Information System (CRIS) Listed Historic Sites						
A	01102.000042	Bridge E-83, BIN-4023370	Brutus/Cato	3.6	3,5	No
B	01102.000043	Weedsport Canal Terminal Office	Brutus	3.6	3,5	No
C	01102.000044	Weedsport Terminal	Brutus	3.6	3,5	No
D	01103.000015	Bridge E-80, BIN-4433140	Cato	5.1	3,5	No
E	01103.000090	Bridge E-81, BIN-4431020	Cato/Brutus	4.9	3,5	No
F	01104.000033	Bridge E-84, BIN-4431030	Conquest	1.4	3,5	No
G	01110.000024	Bridge E-85, BIN-4024330	Conquest/Mentz	1.7	3,5	No
H	01111.000037	Bridge E-86, BIN-4431040	Montezuma	3.2	3,5	No
I	01111.000055	Bridge E-87, BIN unknown	Montezuma	5.0	3,5	No
J	01145.000005	Dudley Residence (William Smith Ingram)	Village of Meridian	3.5	3	No
K	01147.000001	Erie Canal Lock 52 Complex	Village of Port Byron	4.2	4	No
L	01149.000085	Weedsport Baptist Church	Village of Weedsport	4.4	3	No
M	01149.000094	Frank and Eliza Tryon Home, ca. 1890	Village of Weedsport	4.3	3	No
N	01102.000008	Centreport Aqueduct	Brutus	4.4	4,5	No
N/A	CRIS Eligible Historic Sites					
	01103.000083	Cato-Meridian Central School	Cato	3.2	3	No
	01103.000085	9602 Bonta Bridge	Cato	4.7	3,5	No
	01104.000036	Greek Revival Schoolhouse	Conquest	0.7	2	No
	01107.000030	Farmstead	Ira	3.1	3	No
	01110.000023	Erie Canal Prism	Mentz	4.0	5	No
	01142.000006	Cobblestone House	Village of Cato	2.1	3	No
	01142.000007	Chilson Cobblestone House	Village of Cato	2.2	3	No
	01142.000018	Unknown	Village of Cato	2.4	3	No
	01142.000019	Unknown	Village of Cato	2.4	3	No

Map ID	USN	Resource Name	Town/Village	Distance (miles)	LSZ	Potential Visibility*
	01142.000032	Titus Warehouse	Village of Cato	2.2	3	No
	01145.000010	1st Baptist Church	Village of Meridian	3.6	3	No
	01145.000020	Unknown	Village of Meridian	3.4	3	No
	01145.000021	Meridian Village Cemetery	Village of Meridian	3.3	3	No
	01145.000022	Unknown	Village of Meridian	3.4	3	No
	01145.000023	Meridian District Schoolhouse	Village of Meridian	3.6	3	No
	01145.000047	Unknown	Village of Meridian	3.4	3	No
	01147.000020	Unknown	Village of Port Byron	4.1	3	No
	01147.000023	Unknown	Village of Port Byron	4.4	3	No
	01147.000029	Port Byron Hotel	Village of Port Byron	4.3	3	No
	01147.000037	Mill - Former Hitchcock Electroplating Facility	Village of Port Byron	4.1	3	No
	01149.000005	Unknown	Village of Weedsport	4.5	3	No
	01149.000034	Unknown	Village of Weedsport	4.5	3	No
	01149.000049	Unknown	Village of Weedsport	4.4	3	No
	01149.000050	Unknown	Village of Weedsport	4.4	3	No
	01149.000051	Unknown	Village of Weedsport	4.3	3	No
	01149.000052	Unknown	Village of Weedsport	4.4	3	No
	01149.000053	Unknown	Village of Weedsport	4.4	3	No
	01149.000084	Weedsport Elementary School	Village of Weedsport	4.4	3	No
		Historic Architectural Survey Additional Recommended NRHP Sites³				
O	N/A	11676 Old State Road	Victory	1.9	2	No
P	N/A	Emerson Church Cemetery, O'Neil Road	Conquest	0.2	4	No

Map ID	USN	Resource Name	Town/Village	Distance (miles)	LSZ	Potential Visibility*
Q	N/A	10430 Conquest Road	Conquest	0.4	3	No
R	N/A	10418 Conquest Road	Conquest	0.5	3	No
S	N/A	Conquest Cemetery, Conquest Road	Conquest	0.3	3	No
T	01104.000037	Conquest Methodist Church ⁴	Conquest	0.4	3	No

¹ Expected visibility is based on LiDAR-based viewshed analysis results that include trees and buildings and is reflective of realistic landscape conditions per Stipulation 24(b)(1).
² Distance reflects main larger parcel to southwest. One small parcel is 0.3 miles to east at Mud Pond.
³ Based on historic architectural survey conducted within the Area of Potential Effects which was determined to be two miles. Survey was conducted in February 2021. Refer to Exhibit 20 for full details.
⁴ Previous status was "Undetermined" by SHPO. Is now a "Recommended NRHP Site" based on February 2021 historic architectural survey.

(5) Viewpoint Selection

Integrating the results of the GIS resources inventory data along with the viewshed analysis results provided desktop reconnaissance for recognizing areas with potential visibility and identifying candidate locations for photosimulations. While focusing on inventoried locations as listed in Exhibit 24(b)(4), an additional objective in the viewpoint selection process is to also choose locations for simulations that represent the various LSZs as well as Distance Zones. Further, site field visits are also necessary for ground-truthing and increasing the understanding of the visual environment.

Potential visibility, as noted by the viewshed results in Appendix 24-1 mapping, guided the candidate locations for simulation viewpoints per Stipulation 24(b)(3). The viewshed mapping shows the most prominent visibility is within Distance Zone 1 (0.5 miles) of the Project, with some extremely minor predicted visibility in Distance Zone 2 and no predicted visibility in Distance Zone 3. The majority of areas with visibility occur within the Project Area which is defined as parcels belonging to participating landowners. It is often difficult to obtain representative simulation photos at distance because there are often minimal locations with far reaching views of solar projects in the northeast. And, as noted in Table 24-4, there are no listed visual receptors that will experience views of the Project except for short segments of two private, seasonal snowmobile trails that run through discrete locations in the Project Area, as well as along the right-of-way (ROW) of the existing NYPA 345 kV Pannell to Clay transmission line at the northern part of the site. In fact,

very few resources are even present within 1 mile. Therefore, much of the focus for viewpoint locations are closer to the Project where visibility is predicted near residences and segments of roadway among areas of non-participating landowners. Cardinal compass directions as well as central interior locations were also considered.

Stipulation 24(b)(4) requires both general and specific consultations with affected agencies and municipalities. “The applicant shall confer with municipal planning representatives, DPS, New York State Department of Environmental Conservation (NYSDEC), OPRHP, and where appropriate, Adirondack Park Agency (APA) in its selection of important or representative viewpoints that may be subject to project visibility.” Per Project stipulations dated March 5, 2021, Stipulation 24(b)(4)(i) states that viewpoint selection will be based on representative or typical views from locations predicted to have direct line-of-sight visibility of facility components, based on results of preliminary viewshed mapping.

On January 27, 2021, an information request was sent out to stakeholders. In this request, a preliminary visual report was provided, indicating the extent and findings of visibility studies at that point in time which consisted of identified visual resources as well as the result of the trees-only viewshed analysis, Project mapping, and the Project Photolog. Opportunity was provided for stakeholders, including local municipalities with predicted visibility of the project, to suggest additional and reasonable candidate locations for photosimulations or to append additional visual resources of concern to the inventory. This request to stakeholders was specific to locations that were publicly accessible.

DPS responded in a letter dated February 10, 2021. In their response letter, DPS suggested viewpoint location photos that should be considered for final simulations as presented in Attachment 5 Outreach Correspondence.

In a letter dated February 12, 2021, the Town of Conquest responded to the Project outreach solicitation letter. As noted, the Applicant’s solicitation letter was for possible viewpoint locations that had public access only. The Town of Conquest, however, only added 12 additional simulation requests not in areas of public access but on private properties. Neither the Stipulations nor the Article 10 regulations require the production of simulations from a multitude of private backyards in the VSA. Four of the 12 locations listed as a request for additional simulations were disregarded as they appear to be in the middle of agricultural fields and not near a residence.

The Applicant has provided 8 simulations for the Project. The Applicant’s selection of representative simulations for the Project weighed heavily towards viewpoints from the pool of available photos from the Project Photolog that were representative or close to the Town’s list of private properties while also addressing DPS’s preferred viewpoints. In summary, the Applicant has prepared 8 simulations that are representative of the Project with respect to LSZs and inventoried visual resources with predicted visibility, different distance zones as best as Project views allowed, different viewer types, varying lighting conditions, and views that offered as much of a clear, unobstructed sightline as possible, in joint consideration of the Town of Conquest response comments as well as DPS suggested viewpoints.

Table 24-5 outlines the viewpoints chosen for simulations or lines of sight.

Table 24-5. Summary Table Simulation and LOS Viewpoints

Viewpoint ID	Location	Town	Approximate Distance to Project	Landscape Similarity Zone	Camera Orientation
4b	Slayton Road	Conquest	260 -1,049 feet	1,3	SW
7	Drake Road	Conquest	324 feet	1,3	SW
12	Spook Woods Road	Conquest	60 feet	1	NW
13	Spook Woods Road	Conquest	521 feet	1,2,3	SW
15a	Slayton Road	Conquest	134 -168 feet	1,3	NE
16a	Lake Road	Conquest	545 feet	1,3	NE
19	Cooper Street	Conquest	200 feet	1,3	NE
61	Slayton Road	Conquest	783 -793 feet	1,3	W
L1*	Cooper Street	Conquest	236 feet	1	W
L2*	Cooper Street	Conquest	646 feet	1	N
L3*	Cooper Street	Conquest	933 feet	1	NE
<u>L4*</u>	<u>Schooley Road</u>	<u>Conquest</u>	<u>402</u>	<u>3</u>	<u>W</u>
* Line of sight viewpoint					

(6) Photographic Simulations and LOS

As described previously, photographic simulations were prepared using high-resolution photos with three-dimensional visualization software in order to realistically represent the built facilities

from each of the selected viewpoints. The photographic simulations are presented in Attachment 4 of Appendix 24-1 and include locations representative of vantage points at varying distances and compass points. Landscape mitigation for visual screening is proposed for numerous areas of the Project. Both leaf-off and leaf-on mitigation simulations have been provided. The landscaping seen in the simulations were derived directly from the landscape architect. ~~The Landscaping Plan can be found in Appendix 11-2 of Exhibit 11.~~ See Exhibit 24(a)(10) for a discussion of mitigation strategies that include siting considerations and the discussion of vegetative mitigation to reduce visibility of the Project.

Visibility is not relatively extensive in all LSZs or Distance Zones nor is visibility expected at the listed Table 24-4 visual receptors, except for snowmobile trails in the vicinity. Most simulations are from locations that the community would experience are within agricultural land and travel roadways, and near developed residential groupings.

LOS analysis was performed for the collection substation. Results are presented in Attachment 4 of Appendix 24-1.

LOS L4, is a new Line of Sight profile located in the northeastern portion of the Project near Schooley Road where approximately 13.8 acres of panels have been contiguously added as an update to the layout in the nearby open field. Refer to Inset 1 in Figure 24-1 for this area of added panels. A focus area of the residences on Schooley Road looking west to the new arrays was made. As observed in Figure 24-1, a forested area exists between the added panels and Schooley Road residences that are to the east. This forested area is also on a hill. Both vegetation and terrain will screen westerly views to the added array area from nearby eastern residences as demonstrated in LOS Profile Figure 24-2.

(7) Visual Impact Rating of Project Photosimulations

TRC has developed a visual impact rating form for use in comparing Project photosimulations. This form is a simplified version of various federal agency visual impact rating systems. It includes concepts and applications sourced from:

- U.S. (Bureau of Land Management [BLM]), Handbook H-8431: Visual Contrast Rating, BLM January 1986 (USDOl, 1986).
- Visual Resources Assessment Procedure for U.S. Army Corps of Engineers, March 1988 (Smardon, et al., 1988).

- National Park Service (NPS) Visual Resources Inventory View Importance Rating Guide, 2016 (NPS, 2016c).
- United States Department of Agriculture (USDA) Forest Service, Landscape Aesthetics: A Handbook for Scenery Management. USDA Forest Service Agriculture Handbook No. 701, 1995 (USDA, 1995).

Depending on the Project location, a variety of VIA guidance and established procedures exist as noted above that apply to management of federal lands that fall under a specific agency such as the United States Forest Service (USFS) or BLM. These guidance documents vary in regard to agency-specific rating systems or procedures and often begin with the evaluation of existing conditions such as scenic quality or presence of sensitive resource locations.

TRC has developed this form for efficient and streamlined use with projects that undergo state environmental permitting processes. It is assumed that visual resource inventories, terrain analyses, development of LSZs or viewshed analyses have already been performed in the Project VIA according to state regulatory requirements or other visual policy. This form was developed to be used as a numerical rating system for the comparison of Existing Conditions (before) vs. With Project (after) photosimulations of final selected viewpoint locations and is meant to accompany the Project VIA.

For evaluating visual change, there are two parts to the form. Part 1 is the Visual Contrast Rating which rates the Project as it contrasts against compositional visual elements of the viewpoint scene. This includes compositional contrasts against the existing and natural environment such as vegetation, water, sky, landform, or structures. The higher the rating total the higher the contrast. Part 2 is the Viewpoint Sensitivity Rating. This section rates the sensitivity of the viewpoint location which inherently considers the importance of the viewpoint (if it falls within a visual resource area), duration of view, if it is a high use area, or if there is the presence of water. The higher the rating total, the more sensitive the viewpoint is. Part 3 does not rate change but is an overall General Scenic Quality of the View which rates the view of existing conditions only, without the influence of the Project. A more in-depth discussion of how Parts 1-3 were rated can be found in Attachment 6 of Appendix 24-1.

Visual Contrast Ratings Results

The VIA in Appendix 24-1 describes the concepts and methodology applied to rating visual change incurred by the proposed Project by evaluating the Project photosimulations. Simulations of the Project and security fence without mitigation were rated to evaluate contrasts under worst-case conditions with the understanding that proposed vegetative mitigation will moderate views.

Descriptions of the moderating effects of mitigation are discussed in Exhibit 24(a)(6) while simulations showing mitigation are presented in Appendix 24-1. Attachment 6 in Appendix 24-1 provides more detail on panelist qualifications as well as the raw evaluation forms for each simulation viewpoint.

Table 24-6 below summarizes the final scores and averages for Part 1 Visual Contrast, Part 2 Viewpoint Sensitivity and Part 3 Existing Scenic Quality. Here, trends of contrast ratings where those VP locations that are considered to have the highest or lowest visual change in relation to each other can be obtained.

Table 24-6. Visual Impacts Rating Results

VP	Location	Contrast Rating Panelist 1			Contrast Rating Panelist 2			Contrast Rating Panelist 3			Avg Part 1	Avg Part 2	Avg Part 3
		Part 1	Part 2	Part 3	Part 1	Part 2	Part 3	Part 1	Part 2	Part 3			
4b	Slayton Road	18	5.5	2	16	5	1	18	5.5	2	17.3 M	5.3 W	1.7 WM
7	Drake Road	14.5	1.5	2	16	6.5	1.5	10.5	6	2	13.7 M	4.7 W	1.8 WM
12	Spook Woods Road	19	2.5	2.5	17	6	1.5	16	2.5	2	17.3 M	3.7 VW	2.0 M
13	Spook Woods Road	11	5.5	2	11	6	1	11	4.5	2	11.0 WM	5.3 W	1.7 WM
15a	Slayton Road	22	5	2	23	6	0.5	23.5	4.5	2	22.8 S	5.2 W	1.5 WM
16a	Lake Road	15.5	6.5	2	14.5	9	1	14	4.5	2	14.7 M	6.7 W	1.7 WM
19	Cooper Street	14.5	5	1	15	6	0.5	17.5	6	0.5	15.7 M	5.7 W	0.7 W
61	Slayton Road	13.5	6	1	10	5	0.5	11.5	4	2	11.7 WM	5.0 W	1.2 WM

VW=very weak, W=weak, WM= weakly moderate, M=moderate, MS=moderately strong, S=strong

Part 1 Project Contrast Rating

Part 1 Contrast methodology is fully described in Attachment 6 of Appendix 24-1. It rates proposed visual change against existing conditions with respect to compositional elements such as newly introduced lines, shapes, colors, project scale, and broken horizon lines. Under Part 1, there are nine categories to rate, where the total rating ranges from 0 to 27. The scale is as follows:

Contrast Rating Scale	
0	None
0 - 4.5	Very Weak
4.5 - 9	Weak
9 - 13.5	Weakly Moderate
13.5 - 18	Moderate
18 - 22.5	Moderately Strong
22.5 - 27	Strong

The viewpoint with the strongest Part 1 Contrast is VP15a on Slayton Road with an average rating of 22.8. This simulation shows the viewer approximately 134 feet from the Project fence line. The viewing location is at the corner of a field and represents what vehicular traffic would see upon approach to the Project looking to the northeast. While there are two nearby residences in the immediate vicinity approximately 170 feet behind the viewer, there are existing trees on each of those properties that are expected to partially screen views to the arrays. Additional Project mitigation is also proposed for each of the two properties to provide more of a vegetative buffer and year-round screening. The Project will not be seen in its entirety from the VP15a vantage point because only a portion of the arrays are visible from this location. However, the proposed view results in a strong contrast rating due to new form, color, line, and texture contrasts of discernible detail observed at close proximity to the viewer, compared to what is currently there. VP15a is the only simulation viewpoint rated as strong due to the proximal location to the Project that lacks moderating effects such as offset distance and background trees.

The next highest contrast groupings, which are rated as moderate, are VP12 on Spook Woods Road (60 feet from the Project fence line), VP4b on Slayton Road (260 feet away), and VP19 on Cooper Street (200 feet from Project). The average rating for VP12 and 4b is 17.3 while VP19 is 15.7. VP4b and VP19 have vegetative mitigation proposed. VP12 does not have mitigation proposed because there isn't a residence in the immediate location of the vantage point.

VP16a at Lake Road (545 feet away) and VP7 at Drake Road also have moderate ratings but trend towards the lower end of moderate with average ratings of 14.7 and 13.7, respectively. Each of these are several hundred feet from the viewer but have the appearance of fitting into the landscape. These two vantage points also have greater Project offsets from the viewer, compared to the previous four above. VP7 and VP16a have vegetative mitigation proposed.

Two viewpoints are assigned a Part 1 contrast rating of weakly moderate. They are VP61 on Slayton Road (783 feet away) and VP13 on Spook Woods Road (521 feet away) where average ratings are 11.7 and 11.0, respectively. Each of these views has trees or ridges in the background, similar color values to those in the landscape, as well as a viewer offset that moderates the views where they appear visually absorbed. There is vegetative mitigation proposed for VP61. There is no vegetative mitigation proposed for VP13.

Part 2 Viewer Sensitivity Rating

There are eight categories under Part 2 to rate where the total rating ranges from 0 to 24. The scale is as follows:

Contrast Rating Scale	
0	None
0 - 4	Very Weak
4 - 8	Weak
8 - 12	Weakly Moderate
12 - 16	Moderate
16 - 20	Moderately Strong
20 - 24	Strong

Part 2 takes into account viewer sensitivity, in particular if the VP falls within or has a view of an existing visual receptor as well as the character of viewer groups such as number of viewers, duration of view, presence of existing development, etc.

Because Table 24-4 indicates there will be no views of the Project from the listed visual receptors, except for small, private snowmobile trail segments designated as S55B and S55D, most of the viewer sensitivity issues focus on viewer groups related to the community travelers or residences as opposed to recreational viewers or tourists. All Part 2 Viewer Sensitivity ratings were assigned a very weak or weak rating, ranging from 3.7 to 6.7. This is due to the fact that only one viewpoint is within or has a view of a visual receptor but mainly due to the fact that Project views are located

within a rural area with a low number of viewers and local residences, as well as roads with low vehicular traffic. While rated as weak, VP16a has the highest sensitivity rating because it shows a view of a Table 24-4 listed resource where a private snowmobile trail runs adjacent to State Route 38.

Part 3 Scenic Quality Rating

Part 3 Scenic Quality is a standalone single rating that assesses the overall scenic quality of the VP's existing conditions. For this rating, there is no evaluation of visual change, only a simple appraisal of the scenic quality of the view. A rating of 1 is weak, 2 is moderate, and 3 is strong.

VP12 at Spook Woods Road is the highest rated with a moderate value of 2. Scenic quality for the remaining seven simulations is generally rated as weak to moderate. However, this is not to imply that views are not pretty, restful, or important to the community. Although there are restful views of open fields, panelists also felt that the particular viewpoint views were average and typical of the area and that views did not offer a high degree of visual interest such as landscape diversity, show distinct aesthetic focal points that enhance scenic quality, or offer other types of outstanding views according to criteria in Attachment 6 in Appendix 24-1. Several of the views also showed some type of development. Most views have a similar large horizontal shape in the photo consisting of foreground-midground fields in the bottom half of the photo and several with a band of background trees in the middle and the upper half of the photo showing sky. However, the intent was to provide simulations of the Project from visual resources and representative views of what the community would experience from nearby residences and roadways.

(8) Visible Effects Created by the Project

As applicable to the proposed Project technology and as part of this Application, the comprehensive VIA examined the overall appearance, operational characteristics, and general visible effects of the Project by means of computerized GIS viewshed and terrain analysis and with the use of specialized 3d visualization software. Viewshed analyses results are mapped for illustrating geographic locations of predictive visibility as well as having used resultant data to quantify and compare amounts of visibility within varying parameters such as Distance Zones, LSZs, and sensitive receptors. More descriptive and qualitative assessments of the proposed Project were further provided with photosimulations that show comparisons between existing conditions and conditions with the Project.

A Glint and Glare Analysis report has been provided in Appendix 24-2. The findings are briefly summarized in Exhibit 24(a)(9).

The viewshed analysis concludes that 2.47% of the land area within the VSA expects some level of full or partial views of the solar arrays where there would be some areas from which the Project would be in view and, in contrast, a multitude of areas from which they would not be seen. Visibility results also indicate that 1.75% of the total 2.47% visibility of arrays within the VSA occurs within the Project Area, and thus, on participating landowner properties. The remaining 0.72% of Project visibility will occur on non-participating landowner parcels or along roadways. In addition, where there are potential residence views of the Project, the Applicant has also proposed vegetative mitigation for those nearby residences in order to screen and minimize views of the Project to the maximum extent practicable. There are also attributes of the design of this solar project that would minimize the Project's impacts as discussed in Exhibit 24(a)(10). Refer to 24(a)(8) for a discussion on the nature and degree of visual change during operation of the Project.

(9) Documentation of Stakeholder Outreach

A detailed discussion of the stakeholder outreach can be found in Exhibit 24(b)(5). Documentation of the outreach correspondence as well as the visual stakeholder list is included as Attachment 6 in Appendix 24-1.

(10) Short-Term Visual Effects Created by the Project

Potential visibility during construction is anticipated to be minor and temporary in nature. Construction activities of a typical facility, and thus short-term effects, normally involve the following major actions with potential visibility: building/upgrading roads, constructing laydown areas, tree clearing activities, transporting components and other materials and equipment related to the solar site, assembling the solar array's racking system, constructing ancillary structures (e.g., collection substation, fences) and installing power-conducting cables (typically buried). These elements are quite typical of many major construction projects. Construction visual contrasts would vary in frequency and duration throughout the course of construction. There may be periods of intense activity followed by periods with less activity and associated visibility would vary in accordance with construction activity levels. Construction schedules are project dependent. Potential visual contrasts from construction activities include contrasts in form, line, color, and texture as well as motion, as a result of these activities.

Heavy vehicles/equipment will not be traveling to and from the site regularly. Most of the equipment will stay on the site for the days needed, and thus would not be going back and forth to the site each day. The hours of construction are to be determined but are likely to be 7:00 AM to 7:00 PM Monday through Saturday. Please refer to Exhibit 25 for greater specificity on number, frequency, and timing of vehicle trips, as well as the types of construction equipment and materials that will be seen on-site.

There will also be temporary stockpiles, stormwater management, and erosion control measures in place during construction. Landscape planting activities will take place post construction.

References

Massachusetts Department of Energy Resources. "Clean Energy Results, Questions and Answers, Ground Mounted Solar Photovoltaic Systems." Energy Center, June 2015. <http://www.mass.gov/eea/docs/doer/renewables/solar/solar-pv-guide.pdf>.

Multi-Resolution Land Characteristics Consortium. USGS 2016 National Land Cover Database. Available at: <https://www.mrlc.gov/>. Accessed December 2020.

National Park Service (NPS). Find a Park in NY. Available at: <http://www.nps.gov/state/ny/index.htm>. Accessed December 2020.

National Recreation Trails (NRT). The National Recreation Trails Database. Available at: <http://www.americantrails.org/ee/index.php/nationalrecreationtrails>. Accessed December 2020.

National Wild and Scenic Rivers. Explore Designated Rivers. Available at: <https://rivers.gov/map.php>. Accessed December 2020.

New York State Department of Environmental Conservation (NYSDEC). New York's Forest Preserve. Available at: <http://www.dec.ny.gov/lands/4960.html>. Accessed December 2020.

New York State Department of Transportation (NYSDOT) (2016). Annual Average Daily Traffic. Available at: <https://www.dot.ny.gov/tdv>. Accessed December 2020.

New York State Energy Research and Development Authority (NYSERDA). New York Solar Guidebook for Local Governments. January 2019. Available at: <https://www.nyserda.ny.gov/All%20Programs/Programs/Clean%20Energy%20Siting/Solar%20Guidebook>.

New York State GIS Program Office. (NYGISPO). Public Fishing Rights. Available at: <http://gis.ny.gov/gisdata/>. Accessed December 2020.

New York Natural Heritage Program (NYNHP). New York Protected Areas Database. Available at: <http://www.nypad.org/>. Accessed December 2020.

New York State Office of Parks, Recreation and Historic Preservation (NYSOPRHP). State Parks. Site specific request made and received October 2020.

NPS. National Natural Landmarks in New York. Available at: <https://www.nps.gov/subjects/nlandmarks/state.htm?State=NY>. Accessed December 2020.

NPS. Nationwide Rivers Inventory. Available at: <https://www.nps.gov/ncrc/programs/rtca/nri/states/ny.html>. Accessed December 2020.

NYSDEC. List of State Forests By Region. Available at: <http://www.dec.ny.gov/lands/34531.html>. Accessed December 2020.

NYSDEC. Critical Environmental Areas. Available at: <http://www.dec.ny.gov/permits/6184.html>. Accessed December 2020.

NYSDEC. State Lands Interactive Mapper. Available at: <https://gisservices.dec.ny.gov/gis/dil/>. Accessed December 2020.

NYSDEC. Western New York Public Fishing Rights Maps. Available at: <https://www.dec.ny.gov/outdoor/9924.html>. Accessed December 2020.

NYSDEC. Wild, Scenic and Recreational Rivers. Available at: <http://www.dec.ny.gov/permits/32739.html>. December August 2020.

NYSDOT. Bicycling in New York. Available at: <https://www.dot.ny.gov/bicycle/>. Accessed December 2020.

NYSDOT. New York State Scenic Byways. Available at: <https://www.dot.ny.gov/scenic-byways/>. Accessed December 2020.

NYGISPO. Scenic Areas of Statewide Significance. Available at <http://gis.ny.gov/gisdata/>. Accessed December 2020.

NYGISPO. NYSDEC Lands. Available at <http://gis.ny.gov/gisdata/>. Accessed December 2020.

NYSOPRHP. Heritage Areas. Available at: <https://parks.ny.gov/historic-preservation/heritage-areas.aspx>. Accessed December 2020.

NYSOPRHP. Trails. Available at: <http://www.nysparks.com/recreation/trails>. Accessed December 2020.

Smardon, R.C, Palmer, J.F, Knopf, A. and Girinde, K. 1988. Visual Resources Assessment Procedure for US Army Corps of Engineers. Department of the Army.

Town of Brutus (and Village of Weedsport) website. Available at: <https://townbrutus.digitaltowpath.org:10148/content/>. Accessed January 2021.

Town of Cato website. Available at: <https://www.cayugacounty.us/414/Cato-Town>. Accessed January 2021.

Town of Conquest website. Available at: <https://www.cayugacounty.us/518/Conquest-Town>. Accessed January 2021.

Town of Ira website. Available at: <https://www.cayugacounty.us/520/Ira-Town>. Accessed January 2021.

Town of Mentz website. Available at: <https://www.cayugacounty.us/930/Mentz-Town>. Accessed January 2021.

Town of Montezuma website. Available at: <https://townofmontezuma.org/>. Accessed January 2021.

Town of Victory website. Available at: <https://www.cayugacounty.us/980/Victory-Town>. Accessed January 2021.

United States Department of Agriculture (USDA), National Forest Service (1995). Landscape Aesthetics, A Handbook for Scenery Management. Agricultural Handbook 701. Washington D.C.

United States Department of the Interior (USDOI) (2013). Best Management Practices for Reducing Visual Impacts of Renewable Energy Facilities on BLM-Administered Lands. Bureau of Land Management. Cheyenne, Wyoming.

USDOI (1986). Bureau of Land Management. Handbook H-8431: Visual Contrast Rating.

USDOI (1980). Bureau of Land Management. Visual Resource Management Program. U.S. Government Printing Office. 1980. 0-302-993. Washington, D.C.

United States Department of Transportation (USDOT). America's Byways. Available at: <https://www.fhwa.dot.gov/byways/states/NY>. Accessed December 2020.

United States Fish and Wildlife Service (USFWS) (2019). National Wildlife Refuge Locator. Available at: <https://www.fws.gov/refuges/friends/friendsLocatorMaps/index.html>. Accessed December 2020.

Village of Port Byron website. Available at: <https://www.cayugacounty.us/802/Port-Byron-Village>. Accessed January 2021.